

## Multifunction impulse switch with integrated relay function

### ESR61M-8..230V UC



1 + 1 NO contacts potential free 10A/250V AC, incandescent lamps 2000W. No standby loss.

For installation. 45 mm long, 55 mm wide, **32 mm deep**.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high switching capacity of special relays.


Universal control voltage 8..230V UC.

**No permanent power supply necessary, therefore no standby loss.**

**By using a bistable relay causing coil power loss and heating is avoided even in the on mode.** The relay contact can be open or closed when putting into operation. It will be synchronised at first operation.

With the rotary switch ES/ER the functions of the second rotary switch will be pre-selected. The setting ER selects the function in brackets.

#### Rotary switches




10 different functions are selectable:

- 2S** = Impulse switch with 2 NO contacts
- (2R)** = Switching relay with 2 NO contacts
- WS** = Impulse switch with 1 NO contact and 1 NC contact
- (WR)** = Switching relay with 1 NO contact and 1 NC contact
- SS1** = Impulse multi circuit switch 1+1 NO contacts for switching sequence 0 - contact 1 (1-2) - contact 2 (3-4) - contacts 1 + 2
- (RR)** = Switching relay (closed-circuit current relay) with 2 NC contacts
- SS2** = Impulse multi circuit switch 1+1 NO for switching sequence 0 - contact 1 - contacts 1 + 2 - contact 2
- (EW)** = Impulse relay for passing make contact with 1 NO contact and 1 NC contact, wiping time 1 second
- GS** = Impulse group switch 1+1 NO for switching sequence 0 - contact 1 - 0 - contact 2


**(GR)** = Group relay 1 + 1 NO contacts (relay with alternating closing contacts)

**This relay is not suitable to feed back the switching voltage signal of a dimmer switch. Use only relays ESR12DDX-UC, ESR12NP-230V+UC or ESR61NP-8..230V UC for this purpose.**

#### Typical connection

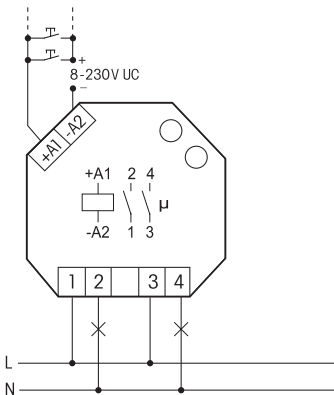

#### Side view



#### Technical Data

Control voltage	8 to 230V UC
Rated switching capacity	10A/250V AC
Incandescent lamp load and halogen lamp load <sup>1)</sup> 230V	2000W
Fluorescent lamp load with KVG in lead-lag circuit or non compensated	1000 VA
Fluorescent lamps with KVG shunt-compensated or with EVG	500 VA
Compact fluorescent lamp with EVG and energy saving lamps	1 on ≤ 70A/ 10 ms <sup>2)</sup>
Standby loss (activ power)	-

<sup>1)</sup> For lamps with 150 W max.

<sup>2)</sup> For electronic ballast gears a 40fold inrush current has to be calculated. For steady loads of 600W use the current-limiting relay SBR61.

## Important reminder!

**Only a trained electrician may install this equipment, otherwise there is a risk of fire or electric shock.**