

Wireless 2-fold transmitter module FSM12/8-24 V UC CE

Wireless 2-fold transmitter module with replaceable antenna. If required, a wireless antenna FA250 can be connected. No standby loss.

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

The wireless transmitter module FSM12/8-24 V UC has two channels and, like a wireless pushbutton, it can transmit wireless telegrams into the Eltako wireless building. A1 initiates a wireless telegram like 'press rocker below' of a wireless pushbutton with one rocker and A3 like 'press rocker above'. The telegram on opening the two control contacts is identical like 'release wireless pushbutton'.


Several wireless transmitter modules must not be switched at the same time.

If the terminals A1 and A3 are connected with a bridge, the wireless telegram is transmitted from A1, as long as the control voltage is applied, e.g. for central commands with priority.

The universal control voltage processes control commands of 8 to 24 V AC with periods lasting min. 0.2 seconds.

No permanent power supply required, therefore no standby losses.

Typical connection

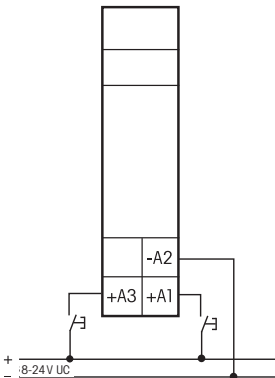

Important reminder!

This electrical equipment may only be installed by skilled electricians otherwise fire hazard or danger of electric shock exists!