

Multifunction universal dimmer switch EUD61M-UC

Power MOSFET 500 W.

Standby loss 0.1 watt only.

Built-in device for installation and surface mounting. 45mm long, 55 mm wide, 18 mm deep.

Universal dimmer switch for R, L and C loads up to 500 watt, depending on ventilation conditions. Dimmable energy saving lamps ESL up to 100 watt. Automatic detection of load R+L oder R+C. ESL is manually settable.

Universal control voltage input 8 to 230V UC, electrically isolated from the 230V supply voltage and switching voltage.

The minimum brightness level (completely dimmed down) can be adjusted **with the rotary switch** %⚙️ e.g. for dimmable energy saving lamps.

The function rotary switch selects 7 different functions.

Zero passage switching with soft start and soft OFF to protect lamps.

Short-time control commands switch on/off, permanent control varies the brightness to the maximum level.


A interruption of control changes the direction of dimming. The brightness level is stored after switching off in case the **function memory** is set.

If the **function on max** is set, it always switches on at the maximum brightness level.

In case of a power failure the switching position and the brightness level are stored. If applicable the dimmer will be switched on at the stored brightness level after the supply voltage is recovered.

Automatic electronic overload protection and over-temperature switch-off.

Function rotary switches



Setting of function ESV same as 'memory+soft on' with setting of a release delay up to 90 minutes with the rotary switch %⚙️ if the manual off command is not given. Before time-out switch-off early warning function by dimming down within 1 minute.

The settings ESL consider the special conditions regarding dimmable energy saving lamps: The starting operation is optimized and the dimm speed changes logarithmically. In these settings the special switching operation for children's rooms is not possible and no wound (inductive) transformer must be dimmed. In position -ESL Memory is switched off. This can be of advantage for energy saving lamps because cold energy saving lamps require a higher minimum brightness as it will possibly be stored in Memory for warmer energy saving lamps.


Switching operation for children's rooms: If the light is switched on by holding down the push-button, it starts at the lowest brightness level after approx. 1 second and dims up slowly as long as the pushbutton is held down without modifying the last stored brightness level.

Snooze function: With a double impulse the lighting is dimmed down from the current dimming position to the minimum brightness level and switched off. The current dimming position as well as the adjustable minimum brightness level determine the dimming time (max. = 60 minutes) which can be reduced as required. It can be switched off at any time by short-time control commands during the lighting is dimmed down. Holding down the push-button during the dimming down process dims up and stops the snooze function.

Mixing of L loads (inductive loads, e.g. wound transformers) and C loads (capacitive loads, e.g. electronic transformers) is not permitted. R loads (ohmic loads, e.g. 230V incandescent lamps and halogen lamps) may be added anytime.

Mixing of L loads and C loads is possible with dimmer switches **EUD12Z** and **EUD12M** in connection with capacity enhancer **LUD12**.

Typical connection

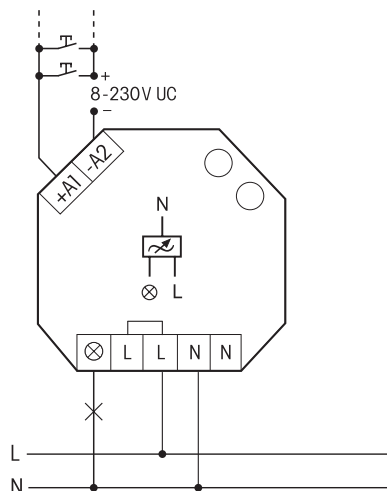

Technical data

Incandescent and halogen lamps 230V (R-loads)	up to 500W ¹⁾
Inductive transformer (L)	up to 500W ¹⁾²⁾³⁾
Electronic transformer (C)	up to 500W ¹⁾²⁾³⁾
Dimmable energy saving lamps ESL ⁵⁾	up to 100W
Max.min temperature at mounting location	+50 °C/-20 °C ⁴⁾
Standby loss (activ power)	0.1 W

¹⁾ The switching capacity depends on the ventilation conditions.

²⁾ Per dimmer it is only allowed to use max. 2 inductive (wound) transformers of the same type, furthermore no-load operation on the secondary part is not permitted. The dimmer might be destroyed. Therefore do not permit load breaking on the secondary part.

³⁾ **When calculating the load a loss of 20 % for inductive (wound) transformers and a loss of 5 % for capacitive (electronic) transformers must be considered in addition to the lamp load.**

⁴⁾ Affects the max. switching capacity.

⁵⁾ In the settings ESL no wound (inductive) transformer must be dimmed.

Warning!

Only a trained electrician may install this equipment, otherwise there is a risk of fire or electric shock.