



61 100 832 - 1



Universal dimmer switch without N connection, especially for LED EUD61NPL-230V

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:
-20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.

Without N connection, POWER MOSFET up to 200 W. Standby loss 0.5 watt only. With control inputs for pushbutton light switches and light switches. With adjustable minimum brightness, dimming technology and dimming speed.

For installation.
45 mm long, 45 mm wide, 18 mm deep.

Universal dimmer switch for R and C loads up to 200 watt, depending on ventilation conditions.

Energy saving lamps ESL and 230 V LED lamps in 'trailing edge' mode up to 200 W or up to 40 W in 'leading edge' mode, depending on ventilation conditions.

If 230 V LED lamps are lightly glowing when they are turned off, a GLE base load must be installed parallel to the lamp.


It is not permitted to connect L loads (inductive loads, like wounded transformers). Zero passage switching with soft start and soft OFF to protect lamps.

Control voltage 230 V. Min. load 4 W. Short-time control commands switch on/off, permanent control varies the brightness up to the maximum level. A short interruption of control changes the direction of dimming. The brightness level is stored after switching off (memory). It is possible to deactivate the memory function by turning 3 times the upper rotary switch to the right stop (max), then it is compatible with ESL. To reactivate the memory function (factory setting), turn the

upper rotary switch 3 times to the left stop. In case of a power failure the switching position and the brightness level are stored, and will switch on after the failure if applicable.

Automatic electronic overload protection and over-temperature switch-off.

Function rotary switches

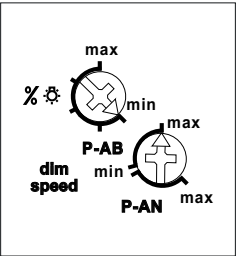

The minimum brightness level (completely dimmed down) can be adjusted with the upper rotary switch %.

The lower rotary switch allows to choose between the both dimming technologies, P-AN leading or P-AB trailing edge and to change the dimming speed. (Simultaneously the duration of soft on and soft off will be adjusted).

If light switches cannot be replaced by pushbutton light switches, there is a separate control input for light switches: If the switch is opened briefly after closing, the light is dimmed until the next time it is opened again briefly. The dimming direction changes automatically at both peaks. The dimming direction can also be changed by opening the switch briefly twice.


Switching operation for children's rooms (only if controlled by pushbutton light switch): If the light is switched on by holding down the pushbutton, it starts at the lowest brightness level after approx. 1 second and dims up slowly as long as the pushbutton is held down without modifying the last stored brightness level.

Snooze function (only if controlled by pushbutton light switch): With a double impulse the lighting is dimmed down from the current dimming position to the minimum brightness level and switched off. The current dimming position as well as the adjustable minimum brightness level determine the dimming time (max. = 60 minutes) which can be reduced as required. It can be switched off at any

time by short-time control commands during the lighting is dimmed down. Holding down the pushbutton during the dimming down process dims up and stops the snooze function.

Without N connection, therefore suitable for mounting directly behind the pushbutton light switch or light switch, even if no N wire is available.

Typical connection

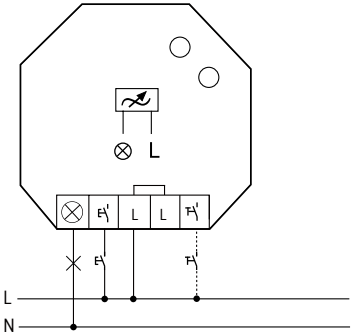

Control by pushbutton switches or light switches.

Technical data

Incandescent and halogen lamps 230 V (R)	up to 200 W ¹⁾
Inductive transformers (L)	-
Electronic transformers (C)	up to 200 W ¹⁾²⁾
Dimmable energy saving lamps ESL	up to 200 W ¹⁾³⁾
Dimmable 230 V LEDs	up to 200 W ¹⁾³⁾⁵⁾
Max./min. temperature at mounting location	+50°C/-20°C ⁴⁾
Standby loss (activ power)	0,5 W

- ¹⁾ The switching capacity depends on the ventilation conditions.
- ²⁾ When calculating the load a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.
- ³⁾ If energy savings lamps or 230 V LED are used in the leading edge operating mode (P-AN), the maximum load is only up to 40 W.
- ⁴⁾ Affects the max. switching capacity.
- ⁵⁾ Different lamp electronics may result in restricted dimming areas, on/off problems and a limited maximum number of lamps (to 10 units), especially if the connected load is very low (e.g. with 5 W LEDs).

Manuals and documents in further languages:



<https://eltako.com/redirect/EUD61NPL-230V>



Must be kept for later use!

ELTAKO GmbH

D-70736 Fellbach

Technical Support English:

+49 711 943 500 25

technical-support@eltako.de

eltako.com

09/2024 Subject to change without notice.