



61 100 802 - 2



Universal dimmer switch

EUD61NPN-230V

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:
-20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.

valid for devices from production week
32/23 (see bottom side of housing)

Universal dimmer switch. Power MOSFET up to 400 W. Automatic lamp detection. Standby loss 0.2 watt only. With adjustable minimum brightness or dimming speed. With switching operation for children's rooms and snooze function.

For installation.

45 mm long, 45 mm wide, 18 mm deep.

Universal dimmer switch for lamps up to 400 watts, depending on ventilation conditions. Dimmable energy saving lamps ESL and dimmable 230 V LED lamps dependent on the lamps electronics.

Switching with soft start and soft OFF to protect lamps.

Control voltage, supply voltage and switching voltage 230 V ~ 50/60Hz.

No minimum load required.

Short-time control commands switch on/off, permanent control varies the brightness to the maximum level.

An interruption of control changes the direction of dimming.


The setting of the brightness level is stored after switching off (Memory).

In case of a power failure the switching position and the brightness level are stored. If applicable the dimmer will be switched on at the stored brightness level after the

supply voltage is recovered.

Automatic electronic overload protection and over-temperature switch-off.

Function rotary switch



With the top rotary switch %/dim speed either the dim speed can be adjusted or the minimum brightness level (completely dimmed down). The duration of soft-on and soft-off will be changed with the dimming speed.

The lower rotary switch determines in operation whether the automatic lamp detection 'AUTO' should act, or one of the special Comfort settings LC1 or LC2.

If the MEM+ setting range is selected, the memory function is active and the last brightness level set is saved when the device is switched off. If the setting range MEM- is selected, the memory function is switched off and it is always switched on with maximum brightness. Dimmable energy-saving lamps must be operated on AUTO and MEM-.

AUTO allows the dimming of all lamp types.

LC1 is a comfort position for dimmable 230 V LED lamps which are not being dimmed down enough when set to AUTO (trailing phase angle) dependent on the construction and must therefore be forced to leading phase angle.

LC2 like LC1, but with different dimming curves.

In positions LC1 and LC2 no inductive (wound) transformers should be used. In addition, the maximum number of dimmable LED lamps can be lower than in the AUTO position dependent on the construction.


With special switching operation for children's rooms: If the light is switched on by holding down the pushbutton, it starts at the lowest brightness level after approx. 1 second and dims up slowly as long as the

pushbutton is held down without modifying the last stored brightness level.

Snooze function: With a double impulse the lighting is dimmed down from the current dimming position to the minimum brightness level and switched off. The current dimming position as well as the adjustable minimum brightness level determine the dimming time (max. = 60 minutes) which can be reduced as required. It can be switched off at any time by short-time control commands during the lighting is dimmed down. Holding down the pushbutton during the dimming down process dims up and stops the snooze function.

Mixing of L loads (inductive loads, e. g. wound transformers) and C loads (capacitive loads, e. g. electronic transformers) is not permitted. R loads (ohmic loads, e. g. 230V incandescent lamps and halogen lamps) may be added anytime.

Typical connection



Control voltage, supply voltage and switching voltage 230 V ~ 50/60Hz

Technical data

Dimmable 230 V LED lamps	Trailing edge up to 400 W ⁵⁾ Leading edge up to 100 W ⁵⁾
Incandescent and halogen lamps ¹⁾ 230 V (R)	up to 400 W
Inductive transformers (L)	up to 400 W ²⁾³⁾
Electronic transformers (C)	up to 400 W ²⁾³⁾
Dimmable energy saving lamps ESL	up to 400 W ⁵⁾
Max./min. temperature at mounting location	+50°C/-20°C ⁴⁾
Standby loss (active power)	0.2 W

¹⁾ Applies to lamps of max. 150 W.

²⁾ Per dimmer it is only allowed to use max. 2 inductive (wound) transformers of the same type, **furthermore no-load operation on the secondary part is not permitted. The dimmer might be destroyed.** Therefore do not permit load breaking on the secondary part. Operation in parallel of inductive (wound) and capacitive (electronic) transformers is not permitted!

³⁾ **When calculating the load a loss of 20% for inductive (wound) transformers and a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.**

⁴⁾ Affects the max. switching capacity.

⁵⁾ Usually applies for dimmable energy saving lamps and dimmable 230 V LED lamps. Due to differences in the lamps electronics, there may be limited dimming range, switch on and off problems dependent on the manufacturer and a restriction on the maximum number of lamps; especially if the connected load is very low (for 5 W-LEDs). The comfort positions LC1 and LC2 optimise the dimming range, which, however, only gives a maximum power up to 100 W. No inductive (wound) transformers may be dimmed in these comfort positions.




The strain relief clamps of the terminals must be closed, that means the screws must be tightened for testing the function of the device. The terminals are open ex works.

Manuals and documents in further languages:



<http://eltako.com/redirect/EUD61NPN-230V>

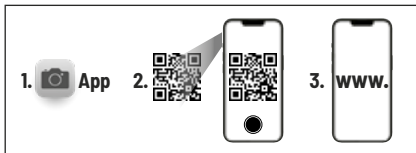

Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

+49 711 94350025

technical-support@eltako.de

eltako.com

20/2023 Subject to change without notice.