


ESR12Z-4DX-UC



*



Also for central control and group control. With 4 independent contacts, 1 NO contact each potential free 16A/250V AC, incandescent lamp load up to 2000W. Standby loss 0.03–0.4 watt only.

Modular devices for DIN-EN 60715 TH35 rail mounting. 2 modules = 36mm wide, 58mm deep.

*** Patented Eltako Duplex technology (DX) allows you to switch 3 of the 4 normally potential free contacts in zero passage switching when 230V A/C voltage 50Hz is switched. This drastically reduces wear. To achieve this, simply connect the N conductor to the terminal (N) and the phase conductors to 1(L), 3(L) or 5(L). This results in an additional standby consumption of only 0.1 watt.** If the channels are used to control switchgear that has no zero passage switching, (N) should not be connected, otherwise the additional off-delay would have the opposite effect.

Local universal control voltage 8 to 230V UC. In addition universal control inputs central ON and central OFF for 8 to 230V UC, electrically isolated from the local inputs.

With additional group control inputs ON and OFF for 8..230V UC. Same potential like the local control inputs. Groups of these impulse switches can be controlled separately using the group control inputs.

Supply voltage like the local control voltage.

By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumers may not be connected to the mains before the short automatic synchronisation after installation has terminated. Central commands always have priority, local control inputs are blocked as long as central commands are activated. In case of a power failure the system is disconnected in a defined mode.

With the upper rotary switch this impulse switch with integrated relay function can be partly or completely excluded from central control:

ZE+ZA = central ON and central OFF ZE = central ON only
 ZA = central OFF only ~~ZE+ZA~~ = no central control

With the middle rotary switch ES/ER the functions of the lower rotary switch will be preselected. The setting ER selects the function in brackets. Not suitable to feed back the switching voltage signal of a dimmer switch. Use only relays ESR12DDX-UC, ESR12NP-230V+UC or ESR61NP-230V+UC for this purpose. With the lower rotary switch 18 different functions may be selected:

ON = Permanent ON

4xS = 4-fold impulse switch with 1 NO contact each, control inputs A1, A3, A5 and A7

(4xR) = 4-fold switching relay with 1 NO contact each, control inputs A1, A3, A5 and A7

4S = Impulse switch with 4 NO contacts

(4R) = Switching relay with 4 NO contacts

2S/WS = Impulse switch with 3 NO contacts and 1 NC contact

(2R/WR) = Switching relay with 3 NO contacts and 1 NC contact

2WS = Impulse switch with 2 NO contacts and 2 NC contacts

(2WR) = Switching relay with 2 NO contacts and 2 NC contacts

SSa = Impulse multi circuit switch 2+2 NO contacts for switching sequence 0-2-2+4-2+4+6; check back signal 8

(4RR) = closed-circuit current relay with 4 NC contacts

SSb = Impulse multi circuit switch 2+2 NO contacts for switching sequence 0-2-2+4-2+4+6-2+4+6+8

(EW) = Impulse relay for fleeting NO contact with 3 NO contacts and 1 NC contact, wiping time 1 sec

GS = Impulse group switch. Switching sequence 0-2-0-4-0-6-0; check back signal 8

(AW) = Impulse relay fleeting NC contact with 3 NO contacts and 1 NC contact, wiping time 1 sec


RS = Switch with 4 NO contacts, A1= set control input and A3 = reset control input

(GR) = Group relay 1+1+1+1 NO contacts

3xS+ = 3-fold impulse switch with 1 NO contact each + check back signal 8, control inputs A1, A3 and A5


(3xR+) = 3-fold switching relay with 1 NO contact each + check back signal 8, control inputs A1, A3 and A5

Function rotary switches

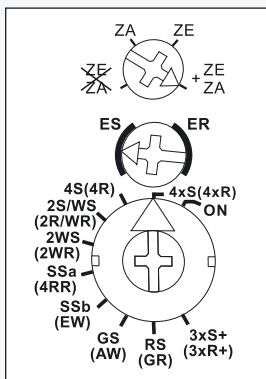

Standard setting ex factory.

Typical circuit with central control and group control

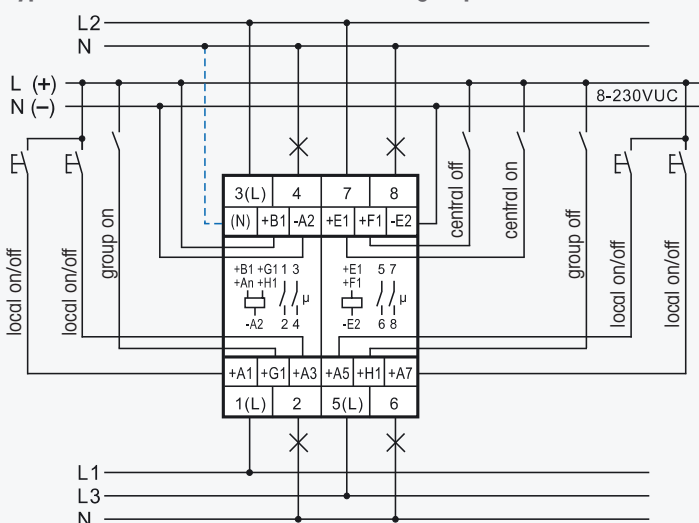

If N is connected, the zero passage switching is active at the contacts 1-2, 3-4 and 5-6.

Technical data page A12. Housing for operating instructions GBA12 page Z5.

ESR12Z-4DX-UC

4 x 1 NO 16 A

EAN 4010312108130

87,80 €/pc.

Recommended retail prices excluding VAT.