

**NEW**

**WSZ12D-65 A**



**MID**



**Maximum current 65A. Standby loss 0.7 watt only.**

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18 mm wide and 58 mm deep.

Accuracy class B (1%). With S0 interface.

This single-phase energy meter measures active energy by means of the current between input and output. The internal power consumption of 0.7 watt active power is neither metered nor indicated.

1 phase conductor with a max. current up to 65A can be connected.

The start current is 40mA.

Two N terminals for secure cross wiring of several counters.

**The 7 segment LC display is also legible twice within a period of 2 weeks without power supply. Press the button.**


Below the displays is a button which you can use to browse through the menu as described in the User Manual. First the **backlighting** switches on. Then you can display the total active energy, active energy of the resettable memory and the instantaneous values for active power, voltage and current.

Power consumption is shown by a bar flashing at a rate of 1000 times per kWh.

**Error message**

In the event of a connection error the bar flashes at a high rate (2 times per second).

**Typical connection**

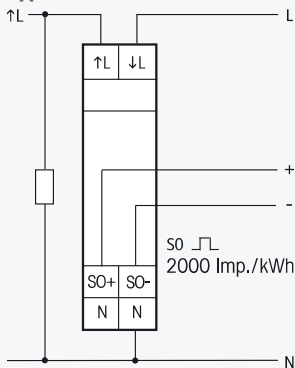

Technical data page F15. Housing for operating instructions GBA12 page Z5.

**WSZ12D-65A**

MID approval

EAN 4010312501283

**140,00 €/pc.**

Recommended retail prices excluding VAT.

F9