


**NEW**

**WSZ12DE-65A**



### Maximum current 65A. Standby loss 0.5 watt only.

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18mm wide and 58mm deep.

Accuracy class B (1%). With SO interface.

This single-phase energy meter measures active energy by means of the current between input and output. The internal power consumption of 0.5 watt active power is neither metered nor indicated. Like all meters without approval (e.g. MID), this meter is not permitted for billing.

**Every 30 seconds, the display switches for 5 seconds from the accumulated active energy in kWh to the momentary consumption in watts.**


1 phase conductor with a max. current up to 65A can be connected. The inrush current is 40mA. The display can only be read when the power supply is on. However, the consumption is saved to a non-volatile memory and is displayed immediately after power restoration.

Two N terminals for secure cross wiring of several counters.


**The flashing decimal point is dependent on power consumption and indicates that power is being consumed. If the connection is incorrectly wired, the display shows the message 'false'.**

The digital display has 7 digits. Two decimal places are indicated up to 99999.99 kWh. Above 100000.0 kWh there is only one decimal place.


### Typical connection

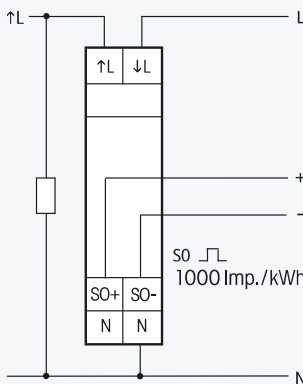

### The power consumption is displayed with a decimal point.



Energy meter connected, no power consumption



Energy meter correctly connected, with power consumption

Technical data page F15. Housing for operating instructions GBA12 page Z5.

**WSZ12DE-65A**

without approval

EAN 4010312501276

**76,20 €/pc.**

Recommended retail prices excluding VAT.