


NR12-002-3x230V



2 CO contacts potential free 10 A/250V AC. Standby loss 0.8 watt only.


Modular device for DIN 60715 TH35 rail mounting.

2 modules = 32 mm wide, 58 mm deep.

All functions same as NR12-001-3x230V but with a second NO contact.

Maximum fusing 16 A.


Typical connections: 1 phase monitoring

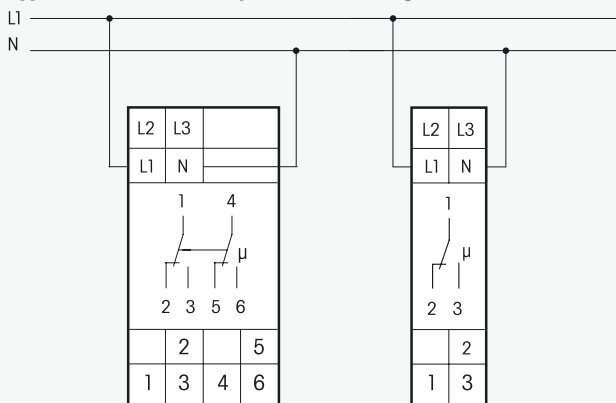

NR12-002-3x230V

NR12-001-3x230V

3 phase monitoring

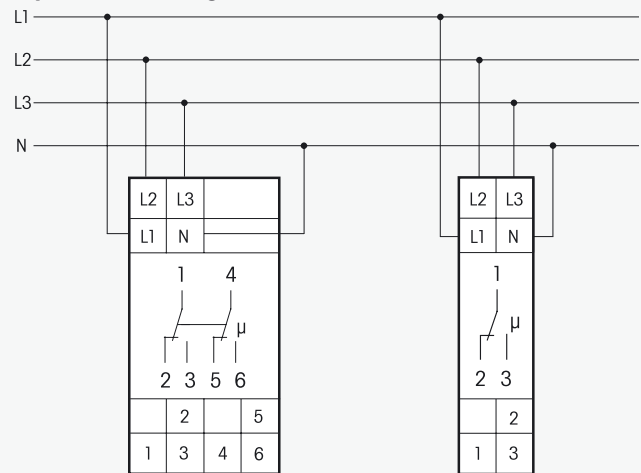

NR12-002-3x230V

NR12-001-3x230V

Technical data page G7. Housing for operating instructions GBA12 page Z5.

NR12-002-3x230V

2 CO 10A

EAN 4010312202548

62,50 €/pc.

Recommended retail prices excluding VAT.