

Wireless actuator



Universal dimmer switch

FUD61NPN-230V

300W power MOSFET, ESL up to 100W and LED up to 100W. Only 0.6 watt standby loss. With adjustable minimum brightness or dimming speed. With switching operation for light alarm clocks, children's rooms and snooze function. Also with light scene control by PC or wireless pushbuttons. Bidirectional wireless and with repeater function.

For installation. 45 mm long, 55 mm wide, 33 mm deep.

Universal dimmer switch for R, L and C loads up to 300 watts, depending on ventilation conditions. Dimmable energy saving lamps ESL up to 100 watts and dimmable 230V LED lamps up to 100 watts. Automatic detection of load R+L or R+C when the lower rotary switch is in position R, L, C. ESL and LED is manually settable.

Zero passage switching with soft ON and soft OFF to protect lamps.

Switching voltage and control voltage local 230V. No minimum load.


The brightness level is stored on switch-off (memory).

In case of a power failure the switch position and the brightness stage are stored and may be switched on when the power supply is restored.

Automatic electronic overload protection and overtemperature switch-off.

From production week 15/2011 with bidirectional wireless communication and a repeater function switch on facility. Every status change and incoming central control telegrams are confirmed by a wireless telegram. This wireless telegram can be taught into other actuators, FUA55 universal displays and the FVS-Software. The current dimming value is also displayed in % in the FVS-Software.

Function rotary switches



The minimum brightness (fully dimmed) or the dimming speed is adjustable with the

% /dimming speed rotary switch. In the setting LRN up to 35 wireless pushbuttons can be assigned, of which one or more central pushbuttons.

Position R,L,C is the setting for all load types except for ESL and LED. In particular for 230V glow and halogen lamps.

The settings +ESL and -ESL consider the special conditions regarding dimmable energy saving lamps: The starting operation is optimized and adapted to the dimming curve. In these settings the special switching operation for children's rooms is not possible and no wound (inductive) transformer must be dimmed. In position -ESL Memory is switched off. This can be of advantage for energy saving lamps because cold energy saving lamps require a higher minimum brightness as it will possibly be stored in Memory for warmer energy saving lamps.

The position LEDs take account of special conditions with dimmable 230V LED lamps: A number of different dimming curves are available. An updated list with dimming curve assignment for commercially available dimmable 230V LED lamps is ready for downloading at www.eltako.com/dimming_curve/LED_gb.pdf. In these settings no wound (inductive) transformer must be dimmed.

In addition to the wireless control input via an internal antenna, this universal dimmer switch can also be controlled locally by a conventional 230V control switch if fitted previously. Either separate local control inputs for dim brighter and dim darker as a direction switch, or these two inputs can be bridged and controlled with a single switch as a universal switch. The dimming direction can then be changed by interrupting the control. Short control commands switch on/off.

The wireless pushbuttons can be taught-in either as direction switches or universal switches:

When installed as a direction switch, one side is then 'switch on and dim up' and the other side is 'switch off and dim down'. A double-click on the switch-on side activates automatic dim-up to full brightness at dim speed. A double click on the switch-off side activates the snooze function. The children's room function is implemented on the switch-on side.

As a universal switch, change the direction by briefly releasing the pushbutton. With switching operation for children's rooms and snooze function.

Switching for light alarm clocks: A wireless signal of a time clock which was taught-in accordingly starts the wake up function by switching on the light at the lowest brightness level and dims up slowly until the maximum level is reached. Dependent on the set dim speed the wake up time is between 30 and

60 minutes. The dimming process is stopped by tapping briefly, e.g. on the hand-held transmitter. At setting ESL is no switching for light alarm clocks possible.

Switching operation for children's rooms

(universal switch or direction switch on the switch-on side): If the light is switched on by holding down the pushbutton, it starts at the lowest brightness level after approx.

1 second and dims up slowly as long as the pushbutton is held down without modifying the last stored brightness level.

Snooze function (universal switch or direction switch on the switch-off side): With a double impulse the lighting is dimmed down from the current dimming position to the minimum brightness level and switched off. The current dimming position as well as the adjustable minimum brightness level determine the dimming time (max. = 60 minutes) which can be reduced as required. It can be switched off at any time by short-time control commands during the lighting is dimmed down.

Light scenes on the PC are set and retrieved using the Wireless Visualisation and Control Software FVS. A description of the FVS is at "eltako-wireless.com". One or several FUD61NPN devices must be taught in on the PC as dimming switches with percentage brightness values.


Lights scenes with wireless switches are taught in on the FUD61NPN device. Up to four brightness values which can be taught-in in light scene pushbuttons with double rocker. Either an FBH or an FAH can be taught in.

If a **wireless motion-brightness sensor FBH** is taught in, the switching threshold at which the lighting with memory value switches on (from approx. 30 lux in the position R,L,C to approx. 300 lux in the position ESL-) depending on the brightness (in addition to the motion) is determined with the lower rotary switch during teach-in. If the FBH is taught in in position ESL+, it is only evaluated as a motion sensor. A dropout delay of 1 minute is fixed in the FBH.

If a **wireless brightness sensor FAH** is taught in, the threshold at which the lighting switches on or off (from approx. 0 lux in the position R,L,C to approx. 50 lux in the position ESL+) depending on the brightness is determined with the lower rotary switch. In the "brightness" mode, switching on takes place with the memory value on dropping below the brightness threshold. Switching off takes place at a brightness of > 200 lux. In the "dim speed" mode the taught brightness threshold is not evaluated. The lighting is switched on and the dimmer turned up to maximum brightness when it is dark. The lighting is dimmed continuously as the surroundings become brighter. The lighting is switched off at a brightness of > 200 lux.

The LED performs during the teach-in process according to the operation manual. It shows wireless control commands by short flickering during operation.

Typical connection

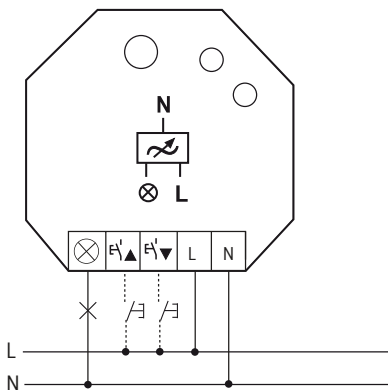

Technical data

Incandescent and halogen ¹⁾	up to 300W lamps 230V (R)
Inductive transformers (L)	up to 300W ²⁾³⁾
Electronic transformers (C)	up to 300W ²⁾³⁾
Dimmable energy saving lamps ESL ⁵⁾	up to 100W
Dimmable 230V LEDs ⁵⁾	up to 100W
Max./min. temperature at mounting location	+50°C/-20°C ⁴⁾
Standby loss (activ power)	0.6W

¹⁾ For lamps with 150W max.

²⁾ Per dimmer it is only allowed to use max. 2 inductive (wound) transformers of the same type, furthermore no-load operation on the secondary part is not permitted. The dimmer might be destroyed. Therefore do not permit load breaking on the secondary part. Operation in parallel of inductive (wound) and capacitive (electronic) transformers is not permitted!

³⁾ **When calculating the load a loss of 20% for inductive (wound) transformers and a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.**

⁴⁾ Affects the max. switching capacity.

⁵⁾ In the settings ESL and LED no wound (inductive) transformer must be dimmed.

Teaching-in wireless sensors in wireless actuators

All sensors must be taught-in in the actuators so that they can detect and execute commands.

Teaching-in actuator FUD61NPN-230V

The teach-in memory is empty on delivery from the factory. If you are unsure whether the teach-in memory contains something or not, **you must first clear the memory contents completely:**

Set the upper rotary switch to CLR. The LED flashes at a high rate. Within the next 10 seconds, turn the lower rotary switch three times to the right stop (turn clockwise) and then turn back away from the stop. The LED stops flashing and goes out after 2 seconds. All taught-in sensors are cleared.

Clear individual taught-in sensors in the same way as in the teach-in procedure, except that you set the upper rotary switch to CLR instead of LRN, and operate the sensor. The LED previously flashing at a high rate goes out.

Teaching-in sensors

1. Setting of the lower rotary switch to the desired teaching-in function: The flashing of the LED as soon as a new setting range has been reached when turning the rotary switch helps to find the desired position reliably.

ESL- = timer as wake-up light;

1 = teach-in 'central off';

2 = universal switch on/off and dim;

Universal switches must be taught-in identically at top and bottom if the switch is to have the same function at top and bottom.

3 = teach-in 'central on';

ESL+ = Direction switches;

Direction switches are fully taught-in automatically when pressed. Where you press defines the switch-on and dim-up functions; the opposite side is then for switch-off and dim-down.

R,L,C = teach in light scene pushbutton, a complete pushbutton with double rocker is assigned automatically;

R,L,C = teach in a PC using the Wireless Visualisation and Control Software FVS. The percentage brightness can be set there between 0 and 100 per cent and saved. Several dimmer switches can be linked to form a light scene.

2. Set the upper rotary switch to LRN.

The LED flashes at a low rate.

3. Operate the sensor which should be taught-in. The LED goes out.

To teach-in further sensors, turn the upper rotary switch briefly away from position LRN. Continue the procedure from pos 1.

After teach-in, set the rotary switches of the actuators to the required function.

Saving light scenes

Up to four brightness values retrievable with a direct light scene pushbutton can be saved.

1. Adjust the required brightness level with a previously taught-in universal or direction switch.
2. Press the pushbutton 3-5 seconds on one of the four rocker ends of the light scene pushbutton with double rocker to save the brightness value.
3. Repeat from point 1 to save further directly retrievable light scenes.

Switching the repeater on and off:

The repeater is switched on or off if the control voltage is applied to the local ▼ control input when connecting the supply voltage. The LED lights up for 2 seconds as a status signal when applying the supply voltage = repeater off (as-delivered state) or 5 seconds = repeater on.

Teaching-in feedback of this actuator in other actuators or FSV software

For switching ON and OFF and simultaneously transmitting of feedback the local control input has to be applied.

Teaching-in feedback of other actuators in this actuator: 'Switch on' will be taught-in in position 'central ON'. 'Switch off' will be taught-in in position 'central OFF'. After teach-in in the function and the desired minimum brightness or dimming speed will be set.



When an actuator is ready for teach-in (the LED flashes at a low rate), the very next incoming signal is taught-in. Therefore, make absolutely sure that you do not activate any other sensors during the teach-in phase.

Important Note!

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock.