



30 000 655 - 4



## German fused safety socket with socket outlet front

**DSS+SD055-**

**Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!**

Temperature at mounting location:  
-20°C up to +50°C.  
Storage temperature: -25°C up to +70°C.  
Relative humidity:  
annual average value <75%.


## German Fused Safety Socket DSS with socket outlet front SD055.

With increased shock protection.

The socket base DSS bearing the VDE sign has plug-in terminals.

SD055: Fitted in 55x55 mm frames R, R2 and R3.

### Exploded view

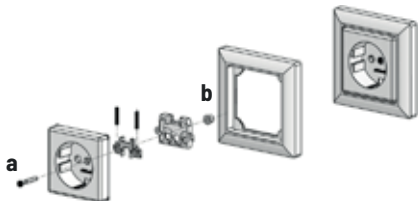


a = Screw

b = Spacing sleeve

Spacing sleeves and screws are included in the scope of supply.

If other bases are used, the right spacing sleeves have to be installed.

### SD055

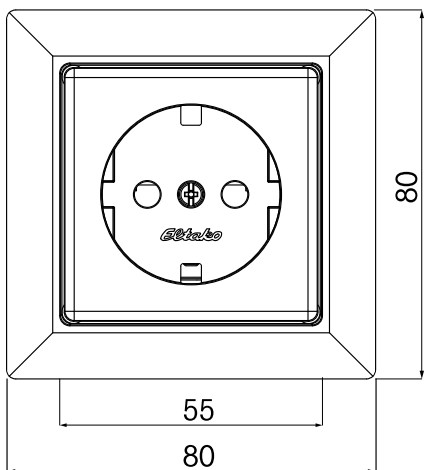


If the required spacer sleeves will not be mounted, the socket top may be damaged.

Manuals and documents in further languages:



[http://eltako.com/redirect/DSS\\*SD055-](http://eltako.com/redirect/DSS*SD055-)

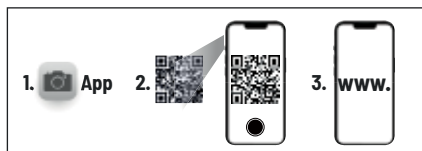

**Must be kept for later use!**

### Eltako GmbH

D-70736 Fellbach

**Technical Support English:**

+49 711 943 500 25

technical-support@eltako.de

eltako.com

15/2023 Subject to change without notice.