

German fused safety socket
with socket outlet front



DSS+SDOF/SDO55

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:

-20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:

annual average value <75%.

German Fused Safety Socket DSS with
socket outlet front SDOF/SDO55.


With increased shock protection.

**The socket base DSS bearing the VDE
sign has plug-in terminals.**

SDOF: Fitted in 63x63mm frames R1F,
R2F and R3F.

SDO55: Fitted in 55x55mm frames R,
R2, R3 and all Q frames.

Exploded view

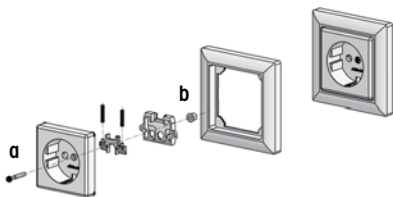


a = Screw

b = Spacing sleeve


Spacing sleeves and screws are included
in the scope of supply.

If other bases are used, the right spacing
sleeves have to be installed.

SDOF



SDO55



If the required spacer sleeves
will not be mounted, the socket
top may be damaged.

Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

☎ Michael Thünte +49 176 13582514

✉ thuente@eltako.de

☎ Marc Peter +49 173 3180368

✉ marc.peter@eltako.de

eltako.com