

German Fused Safety Socket CE

with socket outlet front

DSS + SDO


With increased shock protection.

The socket base DSS bearing the VDE sign has screw terminals.

Fitted in 55x55 mm frames R, R2 and R3 using the enclosed socket intermediate frame SZR.

Fitted in 63x63 mm frames R1F, R2F and R3F using the enclosed socket intermediate frame SZF.

Exploded view

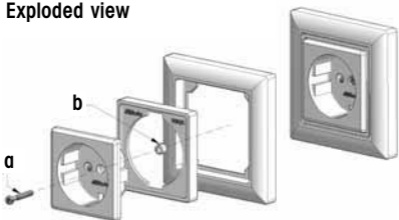

a = Screw

b = Spacing sleeve

