

German fused safety socket  
 with socket outlet front **CE**  
 DSS+SDOF/SDO55/SDO

**Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!**

Temperature at mounting location:

-20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:

annual average value <75%.


**The socket base DSS bearing the VDE sign has plug-in terminals.**

SDOF: Fitted in 63x63mm frames R1F, R2F and R3F.

SDO55: Fitted in 55x55mm frames R, R2, R3 and all Q frames.

SDO: Fitted in 55x55mm frames R, R2, R3 and all Q frames using the enclosed socket intermediate frame SZR.

### Exploded view

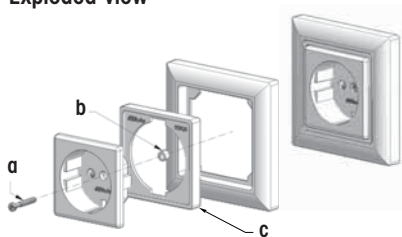

a = Screw


b = Spacing sleeve

c = Intermediate frame for SDO

Spacing sleeves with different lengths and 2 screws are enclosed for mounting.

If other parts are used, the appropriate spacing sleeves have to be mounted.

The spacer 22 with a length of 7 mm is required for all Eltako frames.

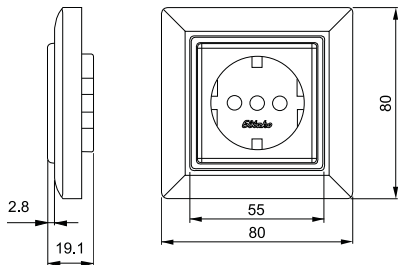

If the required spacer sleeves will not be mounted, the socket top may be damaged.

**Must be kept for later use!**

**Eltako GmbH**

D-70736 Fellbach

+49 711 94350000

www.eltako.com

06/2013 Subject to change without notice.