

E-Design65 fused safety socket
DSS65-wg

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:

-20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:

annual average value <75%.


German fused safety socket DSS with socket outlet front in E-Design65.

Pure white glossy.

With increased shock protection.

The socket base bearing the VDE sign has plug-in terminals.


Fitted in E-Design65 frames R1UE, R2UE, R3UE and R4UE.

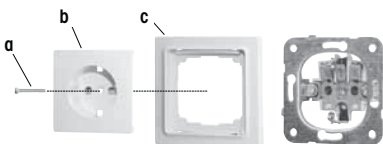

a = screw

b = socket top

c = frame R1UE

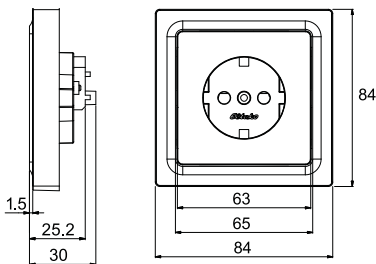

Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

☎ Michael Thünte +49 176 13582514

✉ thuente@eltako.de

☎ Marc Peter +49 173 3180368

✉ marc.peter@eltako.de

eltako.com