

# FMZ14



**Multifunction time relay with 10 functions, 1 CO contact potential free 10 A/250 V AC, 230 V LED lamps up to 400 W, incandescent lamps 2000 watts\*, with DX technology. Bidirectional. Only 0.4 watt standby loss.**

Modular device for DIN-EN 60715 TH35 rail mounting.  
1 module = 18 mm wide, 58 mm deep.

**Connection to the ELTAKO RS485 bus. Bus cross wiring and power supply with jumper.**

Wireless window contacts (FTK) at opened windows with the function NO or NC can be taught-in. If a direction switch is taught-in, a function (e.g. TI) can be started using the top switch (START) and stopped with the bottom switch (STOP).

**Patented ELTAKO Duplex technology allows you to switch normally potential free contacts in zero passage switching when 230 V A/C voltage 50 Hz is switched. This drastically reduces wear. To achieve this, simply connect the N conductor to the terminal (N) and L to K(L). This results in an additional standby consumption of only 0.1 watt.**

If supply voltage fails, the two contacts switch off. When power is restored, contact 1 closes. Time setting between 0.5 second and 10 hours.

Teach-in takes place **using the top and middle rotary switches** and then the time is set. T is the time base and xT the multiplier.


The function is selected **using the bottom rotary switch**:

- RV** = off delay
- AV** = operate delay
- TI** = clock generator starting with impulse
- TP** = clock generator starting with pause
- IA** = impulse controlled operate delay (e.g. automatic door opener)
- EW** = fleeting NO contact
- AW** = fleeting NC contact
- ARV** = operate and release delay
- ON** = Permanent ON
- OFF** = Permanent OFF

**The LED** below the upper function rotary switch performs during the teach-in process according to the operating instructions. It shows control commands by short flickering during operation.

\* The maximum load can be used starting at a delay time or clock cycle of 5 minutes. The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

## Function rotary switches

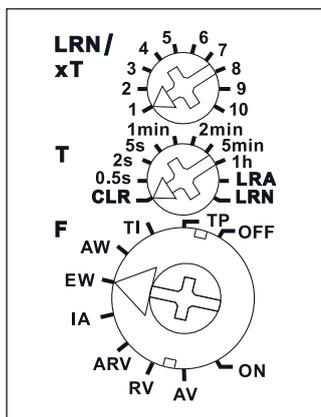

Standard setting ex works.

Further settings can be made using the PC Tool PCT14 (see page 1-5).



Manuals and documents in further languages:  
<https://eltako.com/redirect/FMZ14>

Connection example page 1-51.  
Technical data page 1-53.  
Housing for operating instructions  
GBA14 page 1-50.

<b>FMZ14</b>	RS485 bus actuator Multifunction time relay	<b>Art. No. 30014009</b>	<b>55,40 € /pc.</b>
--------------	--	--------------------------	---------------------