

4-fold impulse switch with integrated CE relay function ESR12Z-4 DX-UC also for central control and group control

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location: -20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity: annual average value <75%.

With 4 independent contacts, 1 NO contact each potential free 16A/250V AC, incandescent lamp load up to 2000W.
Standby loss 0.03-0.4 watt only.

Modular devices for DIN-EN 60715 TH35 rail mounting.
2 modules = 36 mm wide, 58 mm deep.

Eltako Duplex technology (DX) allows you to switch 3 of the 4 normally potential free contacts in zero passage switching when 230V A/C voltage 50Hz is switched. This drastically reduces wear. To achieve this, simply connect the N conductor to the terminal (N) and the phase conductors to 1(L), 3(L) or 5(L). This results in an additional standby consumption of only 0.1 watt. If the channels are used to control switchgear that has no zero passage switching, (N) should not be connected, otherwise the additional off-delay would have the opposite effect.

Local universal control voltage 8 to 230V UC. In addition universal control inputs central ON and central OFF for 8 to 230V UC, electrically isolated from the local inputs.

With additional group control inputs ON and OFF for 8..230V UC. Same potential like the local control inputs. Groups of these impulse switches can be controlled separately using the group control inputs.

Supply voltage like the local control voltage.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.


By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumers may not be connected to the mains before the automatic short synchronisation after installation has terminated.

Central commands always have priority, local control inputs are blocked as long as central commands are activated.

In case of a power failure the system is disconnected in a defined mode.

Function rotary switches

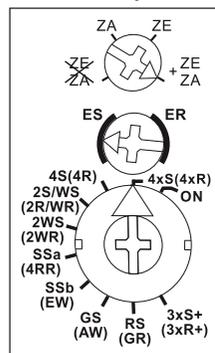

With the upper rotary switch this impulse switch with integrated relay function can be partly or completely excluded from central control:

- ZE+ZA = central ON and central OFF
- ZE = central ON only
- ZA = central OFF only
- ZE+ZA = no central control


With the middle rotary switch ES/ER the functions of the lower rotary switch will be preselected. The setting ER selects the function in brackets. Not suitable to feed back the switching voltage signal of a dimmer switch. Use only relays ESR12DDX-UC, ESR12NP-230V+UC or ESR61NP-8..230V UC for this purpose.

With the lower rotary switch 18 different functions may be selected:

ON = Permanent ON

- 4xS** = 4-fold impulse switch with 1 NO contact each, control inputs A1, A3, A5 and A7
- (4xR)** = 4-fold switching relay with 1 NO contact each, control inputs A1, A3, A5 and A7
- 4S** = impulse switch with 4 NO contacts
- (4R)** = Switching relay with 4 NO contacts
- 2S/WS** = Impulse switch with 3 NO contacts and 1 NC contact
- (2R/WR)** = Switching relay with 3 NO contacts and 1 NC contact
- 2WS** = Impulse switch with 2 NO contacts and 2 NC contacts
- (2WR)** = Switching relay with 2 NO contacts and 2 NC contacts
- SSa** = Impulse multi circuit switch 2 + 2 NO contacts for switching sequence 0-2-2+4-2+4+6; check back signal 8
- (4RR)** = closed-circuit current relay with 4 NC contacts
- SSb** = Impulse multi circuit switch 2 + 2 NO contacts for switching sequence 0-2-2+4-2+4+6-2+4+6+8
- (EW)** = Impulse relay for fleeting NO contact with 3 NO contacts and 1 NC contact, wiping time 1 sec
- GS** = Impulse group switch. Switching sequence 0-2-0-4-0-6-0; check back signal 8
- (AW)** = Impulse relay fleeting NC contact with 3 NO contacts and 1 NC contact, wiping time 1 sec
- RS** = Switch with 4 NO contacts, A1 = set control input and A3 = reset control input
- (GR)** = Group relay 1 + 1 + 1 + 1 NO contacts
- 3xS+** = 3-fold impulse switch with 1 NO contact each + check back signal 8, control inputs A1, A3 and A5
- (3xR+)** = 3-fold switching relay with 1 NO contact each + check back signal 8, control inputs A1, A3 and A5

Typical circuit with central control and group control

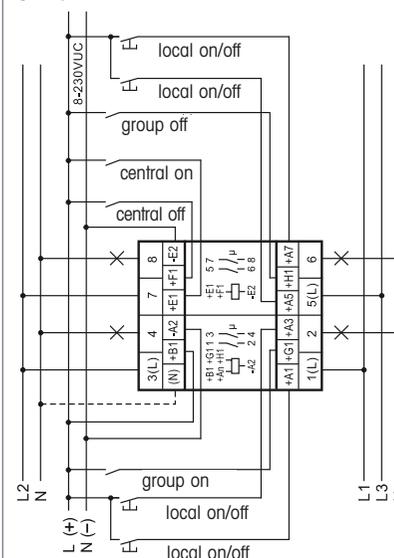

If N is connected the zero passage switching is active at the contacts 1-2, 3-4 and 5-6.

Technical data

Supply voltage and control voltage AC	8..253V
Supply voltage and control voltage DC	10..230V
Rated switching capacity	16A/250V AC
Incandescent lamp load and halogen lamp load ¹⁾ 230V	2000W
Fluorescent lamp load with KVG*1000 VA in lead-lag circuit or non compensated	Fluorescent lamp load with KVG*500 VA shunt-compensated or with EVG*
Fluorescent lamp load with 15x7W, EVG* and energy saving lamps 10x20W ²⁾	
Standby loss (activ power)	0,4W

¹⁾ For lamps with 150W max.

²⁾ If zero passage switching is activated, otherwise I on ≤ 70A/10 ms³⁾

³⁾ For electronic ballast gears a 40 fold inrush current has to be calculated. For steady loads of 1200W use the current-limiting relay SBRI2.

* EVG = electronic ballast units; KVG = conventional ballast units



The strain relief clamps of the terminals must be closed, that means the screws must be tightened for testing the function of the device. The terminals are open ex works.

For later use!

We recommend the housing for operating instructions GBA14.

Eltako GmbH

D-70736 Fellbach
+49 711 94350000
www.eltako.com