







The Successful

Selection table time relays and multifunction time relays	E0
Digital settable multifunction time relay MFZ12DDX	E1
Analogue settable multifunction time relay MFZ12DX	E2
Analogue settable time relays RVZ/AVZ/TGI/EAW12DX	E3
Analogue settable multifunction time relay MFZ12NP	E4
Analogue settable multifunction time relay MFZ12-230V	E5
Analogue settable 2-stage ON-delay A2Z12	E6
Analogue settable multifunction time relay MFZ61DX	E7
Description of functions	E8
Technical data	E9

Selection Table Time Relays and Multifunction Time Relays

The successful

Multifunction time relays with up to 18 functions combined with universal control voltage 8 to 230V UC - a competitive advantage, particularly the digital settable time relays MFZ12DDX. Multifunction time relays always switch at zero passage, the DX devices only when connected to N.


Page		E1	E2	E3	E3	E3	E3	B3	E4	E5	E6	E7
	pictograms	MFZ12DDX-UC	MFZ12DX-UC	RVZ12DX-UC	AVZ12DX-UC	TG12DX-UC	EAW12DX-UC	EUD12D-UC if the function T1 is set	MFZ12NP-230V+UC	MFZ12-230V	AZZ12-UC	MFZ61DX-UC
Modular device for mounting on DIN rail EN 60715 TH35, number of modules 18 mm each		1	1	1	1	1	1	1	1	1	1	
Built-in device for installation (e.g. flush-mounting box)												■
Digital settable		■										
Analogue settable			■	■	■	■	■	■	■	■	■	■
Number of NO contacts (not potential free)								(1)	(1)	1	1+1	1
Number of CO contacts potential free		1	1	1	1	1	1					
Zero passage switching		■ ³⁾	■ ³⁾	■ ³⁾	■ ³⁾	■ ³⁾	■ ³⁾	■	■			■ ³⁾
Switching capacity 16A/250V AC									■			
Switching capacity 10A/250V AC		■	■	■	■	■	■			■	■	■
Incandescent lamp load W		2000	2000	2000	2000	2000	2000	500 ¹⁾	2300	1000	1000	2000
Bistable relay as relay contact		■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾			■ ²⁾	■ ²⁾	■ ²⁾
Universal control voltage		■	■	■	■	■	■	■	■		■	■
Low standby loss		■	■	■	■	■	■	■	■	■	■	■
Multifunction time relay		■	■						■	■		■
Off delay RV		■	■	■					■	■		■
Operate delay AV		■	■		■				■	■		■
Additive operate delay AV+		■	■									
2-stage ON-delay											■	
Fleeting NO contact EW EW		■	■				■		■	■		■
Fleeting NC contact AW		■	■				■		■	■		■
Fleeting NO contact and fleeting NC contact EAW		■	■				■					
Operate and release delay ARV		■	■						■	■		
Additive operate and release delay ARV+		■	■									
Relay function ER		■	■									
Release-delay impulse switch SRV		■	■									
Impulse switch functions ES and ESV		■	■									
Clock generator starting with impulse T1		■	■			■		■	■	■		■
Clock generator starting with pause TP		■	■						■	■		
Impulse controlled operate delay IA (e.g. automatic door opener)		■	■						■	■		■
Pulse shaper IF		■	■									

¹⁾ Up to 3600W with capacity enhancers LUD12-230V.

²⁾ The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

³⁾ Duplex technology: When switched with 230V/50Hz zero passage switching is activated if L is connected to (L) and N to (N). Then additional standby loss of only 0.1 Watt.

MFZ12DDX-UC



**1 CO contact potential free 10A/250V AC. Incandescent lamps 2000W*.
Standby loss 0.05–0.5 watt only.**

Modular device for DIN-EN 60715 TH35 rail mounting.
1 module = 18mm wide, 58mm deep.

With the patented Eltako Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230V AC 50Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 15 (L) for this. This gives an additional standby consumption of only 0.1 Watt.

Universal control voltage 8 to 230V UC. Supply voltage same as the control voltage.

Both functions and times are entered at the touch of a key and indicated digitally on an LC display. Only two keys are required for this purpose.

When setting the time all values can be entered within preset time ranges (0.1 to 9.9 or 1 to 99 seconds, minutes or hours). The longest possible setting is 99 hours. 600 settings are possible. The time setting is continuously displayed digitally.

By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

Functions (description page E8)

- | | |
|--|--|
| RV = off delay | EAW = fleeting NO contact and fleeting NC contact |
| AV = operate delay | ARV = operate and release delay |
| AV+ = operate delay additive | ARV+ = operate and release delay additive |
| TI = clock generator starting with impulse | ES = impulse switch |
| TP = clock generator starting with pause | SRV = release-delay impulse switch |
| IA = impulse controlled pickup delay (e.g. automatic door opener) | ESV = impulse switch with release delay and switch-off early-warning function |
| IF = pulse shaper | ER = relay |
| EW = fleeting NO contact | ON = permanent ON |
| AW = fleeting NC contact | OFF = permanent OFF |

With TI, TP, IA, EAW, ARV and ARV+ functions, a different second time can be entered also with different time ranges.


Setting the times and functions: The LCD component to be changed is selected by pressing the MODE key. The component accessed flashes. Press the SET key to change the component accessed. This may be the function, the time ranges, time T1 or time T2 (on TI, TP, IA, EAW, ARV and ARV+ only). Pressing the MODE key terminates each input. Once the time has been set with MODE, no more components are flashing. The timing relay is now ready to operate. Press the MODE key again to restart the input cycle. All the entered parameters are retained if they are not changed using SET. 25 sec. after the last operation and if the component still flashes the input cycle is automatically terminated and the previously made changes lapse.

Functions of the LC display: If the ON or OFF function was selected, no time is displayed, only ON and OFF and a contact symbol in the correct position. On all other functions, the set time, the function code and the contact symbol are shown in the correct position (open or closed). The clock symbol flashes while the set time is elapsing and the remaining time is shown.

Safety in the event of a power failure: The set parameters are stored in an EEPROM and are therefore immediately available again when the power supply is restored after a power failure.

* The maximum load can be used starting at a delay time or clock cycle of 5 minutes. The maximum load will be reduced for shorter times as follows: up to 2 seconds 15 %, up to 2 minutes 30 %, up to 5 minutes 60 %.

Typical connection

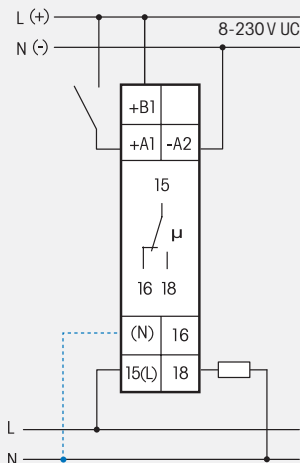

If N is connected, the zero passage switching is active.

Analogue settable universal control voltage Multifunction Time Relay MFZ12DX with 18 functions

MFZ12DX-UC



**1 CO contact potential free 10 A/250 V AC. Incandescent lamps 2000 W*.
Standby loss 0.02–0.6 watt only.**

Modular device for DIN-EN 60715 TH35 rail mounting.
1 module = 18mm wide, 58mm deep.

With the patented Eltako Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230V AC 50Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 15 (L) for this. This gives an additional standby consumption of only 0.1 Watt.

Universal control voltage from 8 to 230V UC. Supply voltage same as control voltage.

Time setting between 0.1 second and 40 hours.

By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

According to the connection of the power supply to the terminals B1-A2 or B2-A2 **two different levels of settings** can be selected:

Functions F with connection of the power supply to B1-A2 (description page E8)
(Standby loss 0.02-0.4 W)

- RV** = off delay
- AV** = operate delay
- TI** = clock generator starting with impulse
- TP** = clock generator starting with pause
- IA** = impulse controlled operate delay (e.g. automatic door opener)
- EW** = fleeting NO contact
- AW** = fleeting NC contact
- ARV** = operate and release delay
- ON** = permanent ON
- OFF** = permanent OFF

Functions (F) with connection of the power supply to B2-A2 (description page E8)
(Standby loss 0.02-0.6 W)

- SRV** = release-delay impulse switch
- ER** = relay
- EAW** = fleeting NO contact and fleeting NC contact
- ES** = impulse switch
- IF** = pulse shaper
- ARV+** = additive operate and release delay
- ESV** = impulse switch with release delay and switch-off early-warning function
- AV+** = additive operate delay
- ON** = permanent ON
- OFF** = permanent OFF


The LED below the big rotary switch indicates the contact position while time-out is in progress. It blinks while the relay contact 15-18 is open (15-16 closed), and is continuously ON as long as the relay contact 15-18 is closed (15-16 open).

The time base T is selected by means of the middle, latching rotary switch **T**. Time-base figures available are 0.1 seconds, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the timebase by the multiplier.

The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).


* The maximum load can be used starting at a delay time or clock cycle of 5 minutes.
The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%,
up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches




Typical connection

Level of setting 1, Functions F

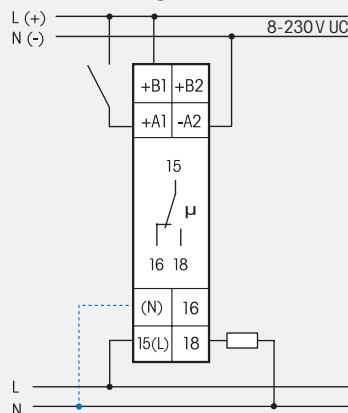

Typical connection

Level of setting 2, Functions (F)

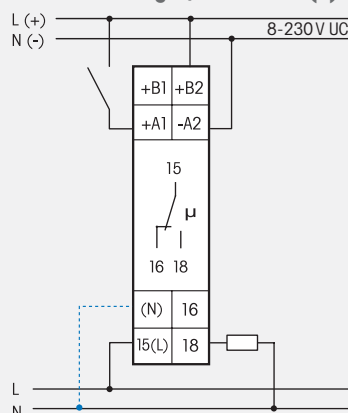

If N is connected, the zero passage switching is active.

Technical data page E9. Housing for operating instructions GBA12 page Z3.

MFZ12DX-UC


1 CO 10A

EAN 4010312603086

57,90 €/pc.

Recommended retail prices excluding VAT.

RVZ/AVZ/TGI/EAW12DX-UC



1 CO contact potential free 10A/250V AC. Incandescent lamps 2000W*. Standby loss 0.02–0.4 watt only.

Modular device for DIN EN 60715 TH35 rail mounting.
1 module = 18mm wide, 58mm deep.

These digital settable time relays are identical to the MFZ12DX-UC, except that they have one function only (description page E8).

On type TGI12DX-UC T1 and T2 can be set separately by a second multiplier while the time base remains the same.

On type EAW12DX-UC different functions can be selected by a rotary switch: fleeting NO contact (EW), fleeting NC contact (AW) or fleeting NO contact and fleeting NC contact (EAW).

With the patented Eltako Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230V AC 50Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 15 (L) for this.

This gives an additional standby consumption of only 0.1 Watt.

Universal control voltage from 8 to 230V UC. Supply voltage like control voltage.

Time setting between 0.1 second and 40 hours.

By using a bistable relay coil power loss and heating is avoided even in the on mode.


The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

The LED below the big rotary switch indicates the contact position while time-out is in progress. It blinks while the relay contact 15-18 is open (15-16 closed), and is continuously ON as long as the relay contact 15-18 is closed (15-16 open).

The time base T is selected by means of the middle, latching rotary switch **T**. Time-base figures available are 0.1 seconds, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the time base by the multiplier.

The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).

Typical connection

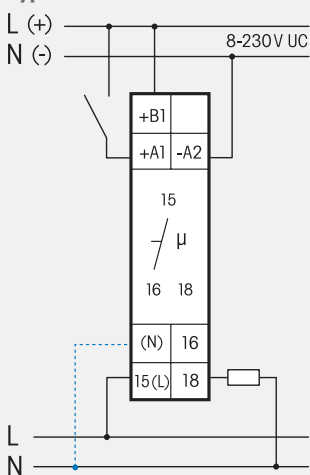


If N is connected, the zero passage switching is active.

* The maximum load can be used starting at a delay time or clock cycle of 5 minutes.


The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches

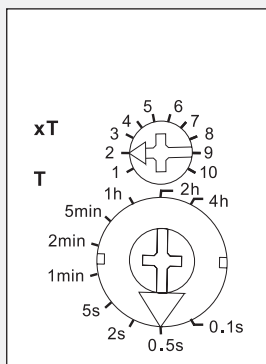


RVZ/AVZ12DX-UC

Function rotary switches

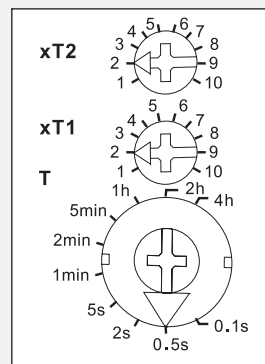

TGI12DX-UC

Function rotary switches

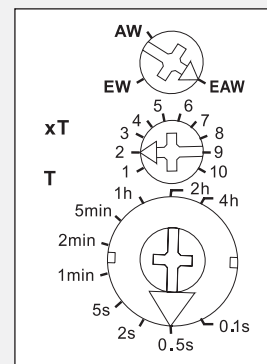


EAW12DX-UC

Technical data page E9. Housing for operating instructions GBA12 page Z3.

RVZ12DX-UC	RV release delay (OFF delay)	EAN 4010312603093	45,40 €/pc.
AVZ12DX-UC	AV operate delay (ON delay)	EAN 4010312603109	45,40 €/pc.
TGI12DX-UC	TI clock generator starting with impulse (flasher relay)	EAN 4010312603116	45,40 €/pc.
EAW12DX-UC	EW+AW+EAW fleeting NO contact and fleeting NC contact	EAN 4010312603123	45,40 €/pc.

Analogue settable Multifunction Time Relay MFZ12NP with 10 functions

MFZ12NP-230 V+UC



1 NO contact not potential free 16 A/250 V AC. Incandescent lamps 2300 W*. Standby loss 0.5 watt only.

Modular device for DIN EN 60715 TH35 rail mounting.
1 module = 18 mm wide, 58 mm deep.

Zero passage switching to protect contacts and lamps.
This prolongs in particular the lifetime of energy saving lamps.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

230V control voltage and additionally 8 to 230V UC electrically isolated universal control voltage. 230V supply voltage and switching voltage.


Very low switching noise.

Time settings between 0.1 seconds and 40 hours.

Functions F (description page E8)


- RV** = release delay
- AV** = operate delay
- TI** = clock generator starting with impulse
- TP** = clock generator starting with pause
- IA** = impulse-controlled operate delay
- EW** = fleeting NO contact
- AW** = fleeting NC contact
- ARV** = operate and release delay
- ON** = permanent ON
- OFF** = permanent OFF

Function rotary switches

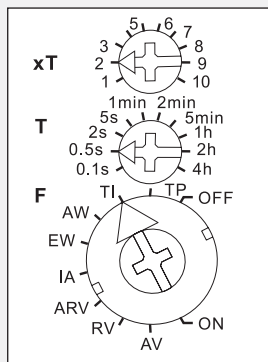

Standard setting ex factory.

Typical connection

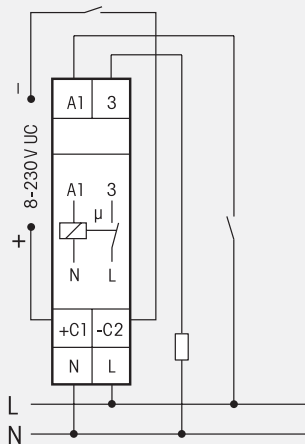

The time base T is selected by means of the middle, latching rotary switch **T**. Time-base figures available are 0.1 second, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the time base by the multiplier.

The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).

* The maximum load can be used starting at a delay time or clock cycle of 5 minutes. The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

Technical data page E9. Housing for operating instructions GBA12 page Z3.

MFZ12NP-230V+UC


1 NO 16 A

EAN 4010312602935

46,20 €/pc.

Recommended retail prices excluding VAT.

MFZ12-230V



**1 NO contact potential free 10 A/250 V AC. Incandescent lamps 1000 W*.
Standby loss 0.4 watt only.**

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18mm wide, 58mm deep.

Control voltage 230V. Supply voltage same as control voltage.

Time setting between 0.1 second and 40 hours.

Functions F (description page E8)

- RV** = off delay
- AV** = operate delay
- TI** = clock generator starting with impulse
- TP** = clock generator starting with pause
- IA** = impulse controlled operate delay (e.g. automatic door opener)
- EW** = fleeting NO contact
- AW** = fleeting NC contact
- ARV** = operate and release delay
- ON** = permanent ON
- OFF** = permanent OFF


The LED below the big rotary switch indicates the contact position while time-out is in progress. It blinks while the relay contact is open, and is continuously ON as long as the relay contact is closed.

The time base T is selected by means of the middle, latching rotary switch **T**. Time-base figures available are 0.1 seconds, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the timebase by the multiplier.

The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).


* The maximum load can be used starting at a delay time or clock cycle of 5 minutes. The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches

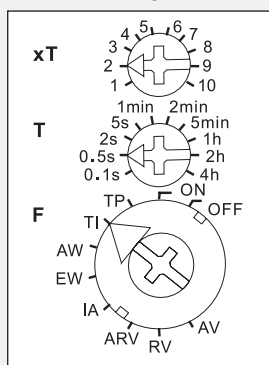

Standard setting ex factory.

Typical connection

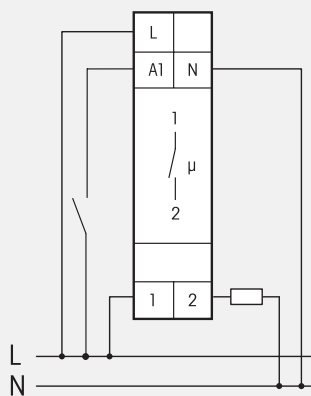

Technical data page E9. Housing for operating instructions GBA12 page Z3.

MFZ12-230V

1 NO 10 A

EAN 4010312603147

39,60 €/pc.

Recommended retail prices excluding VAT.

E5

Analogue settable 2-stage ON-delay A2Z12

A2Z12-UC



1+1 NO contact potential free 10A/250V AC. Incandescent lamps 1000W. Standby loss 0.4 watt only.

Modular device for DIN EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

Universal control voltage input 8 to 230V UC. Supply voltage is same as the control voltage.

Contact position display with two LEDs.


By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

In case of a power failure the system is disconnected in a preset sequence.


When the control voltage is applied, the time lapse T1 starts between 0 and 60 seconds. At the end of the time lapse, contact 1-2 closes and time lapse T2 starts between 0 and 60 seconds. At the end of this time lapse, contact 3-4 closes. After an interval, the time lapse starts again at T1.

Function rotary switches



Standard setting ex factory.

Typical connection

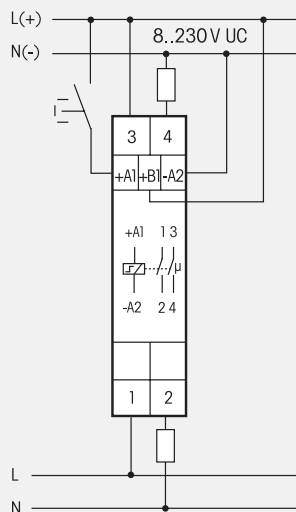

Technical data page E9. Housing for operating instructions GBA12 page Z3.

A2Z12-UC

1+1 NO 10A


EAN 4010312603178

51,00 €/pc.

Recommended retail prices excluding VAT.

NEW

MFZ61DX-UC



1 NO contact potential free 10 A/250 V AC. Incandescent lamps 2000 W*. Standby loss 0.02–0.4 watt only.

Built-in device for installation. 45 mm long, 55 mm wide, 18 mm deep.

With the patented Eltako Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230 V AC 50 Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 1 (L) for this. This gives an additional standby consumption of only 0.1 Watt.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

By using a bistable relay coil power loss and heating is avoided even in the on mode.

The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

Universal control voltage input 8 to 230 V UC. Supply voltage is same as the control voltage.

Time settings between 0.5 seconds and 1 hour.

Functions F (description page E8)

RV = off delay

AV = operating delay

TI = clock generator starting with impulse


IA = impulse-controlled operating delay

EW = fleeting NO contact

AW = fleeting NC contact


* The maximum load can be used from a delay time or clock cycle of 5 minutes. The maximum load is reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches



Standard setting ex factory.

Typical connection



If N is connected, the zero passage switching is active.

E7

Technical data page E9. Short-stroke pushbuttons KT4 page Z1.

MFZ61DX-UC

1 NO 10A

EAN 4010312603055

40,40 €/pc.

Recommended retail prices excluding VAT.

Description of functions of the Time Relays and Multifunction Time Relays

The contact 15-18 corresponds on MFZ12NP to the contact L-3. The terminals A1-A2 correspond on MFZ12NP to the terminals A1-N or C1-C2. The contact 15-18 corresponds on MFZ61DX and MFZ12-230V to the contact I-2. The terminals A1-A2 correspond on MFZ12-230V to the terminals A1-N.

RV = Release delay


(OFF delay)



When the control voltage is applied the relay contact switches to 15-18. When the control voltage is interrupted the timing period is started; on time-out the relay contact returns to normal position. Resettable during the timing period.

AV = Operate delay


(ON delay)



When the control voltage is applied the timing period is started; on time-out the relay contact changes to 15-18. After an interruption, the timing period is restarted.


TI = Clock generator starting with impulse

(flasher relay)




As long as the control voltage is applied the relay contact opens and closes. On MFZ12DX, MFZ12NP and MFZ61DX the changeover time in both directions is identical, and is equal to the preset time. On TGI2DX both times can be set separately (identical time base, but additional multiplier), on MFZ12DDX it is completely settable separately. When the control voltage is applied the relay contact immediately changes to 15-18.

TP = Clock generator starting with pause (flasher relay)




Description of function same as for TI, except that, when the control voltage is applied, the contact initially remains at 15-16 rather than changing to 15-18.

IA = Impulse-controlled operate delay




The timing period t_1 starts with a control impulse from 50ms; on time-out the relay contact changes for the timing period t_2 (for MFZ12DX = 1 second, for MFZ12NP and MFZ61DX = 3 seconds) to 15-18 for 1 second (e.g. for automatic door opener). If t_1 is set to $t_1 \text{ min} = 0.1$ seconds, the IA operates as pulse shaper, when timing period t_2 elapses, independent of the duration of the control impulse (min. 150ms).

EW = Fleeting NO contact




When the control voltage is applied the NO contact changes to 15-18 and reverts on wiping time-out. If the control voltage is removed during the wiping time the NO contact immediately reverts to 15-16 and the residual time is cancelled.

AW = Fleeting NC contact



When the control voltage is interrupted the NO contact changes to 15-18, and reverts on wiping time-out. If the control voltage is applied during the wiping time the NO contact immediately reverts to 15-16 and the residual time is cancelled.

ARV = Operate and release delay



When the control voltage is applied the timing period starts; on time-out the relay contact changes to 15-18. If the control voltage is interrupted then, another timing period is started and, on time-out, the relay contact to normal position. On MFZ12DX, MFZ12NP and MFZ61DX this release delay is identical to the operating delay, on MFZ12DDX it is completely settable separately. After an interruption of the operating delay, the timing period is restarted.

ER = Relais

As long as the control contact is closed the make contact reverts from 15-16 to 15-18.

EAW = Fleeting NO contact and fleeting NC contact



When the control voltage is applied or interrupted the relay contact changes to 15-18 and reverts after the set wiping time.

ES = Impulse switch

With control impulses from 50ms the make contact switches to and fro.

IF = Pulse shaper



When the control voltage is applied the relay contact changes to 15-18 for the set time. Further control impulses are evaluated only after the set time has elapsed.

ARV+ = Additive operate and release delay

Same function as ARV, but after an interruption of the operate delay the elapsed time is stored.

ESV = Impulse switch with release delay and switch-off early-warning function

Function same as SRV. Additionally with switch-off early warning: approx. 30 sec. before time-out the lighting starts flickering 3 times at gradually shorter time intervals.


AV+ = Additive operate delay

Function same as AV. However, after an interruption the elapsed time is stored.

SRV = Release-delay impulse switch

With control impulses from 50ms the make contact switches to and fro. In the contact position 15-18, the device switches automatically to the rest position 15-16 on delay time-out.

A2 = 2-stage ON-delay

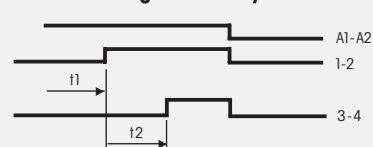

When the control voltage is applied, the time lapse T_1 starts between 0 and 60 seconds. At the end of the time lapse, contact 1-2 closes and time lapse T_2 starts between 0 and 60 seconds. At the end of this time lapse, contact 3-4 closes. After an interval, the time lapse starts again at T_1 .

	MFZ12DDX^{b)} MFZ12DX^{b)} RVZ/AVZ/TGI/EAW12DX^{b)}	MFZ12NP	MFZ12-230 V A2Z12-UC	MFZ61DX^{b)}
Contacts				
Contact material/contact gap	AgSnO ₂ / 0,5 mm	AgSnO ₂ / 0,5 mm	AgSnO ₂ / 0,5 mm	AgSnO ₂ / 0,5 mm
Spacing of control connections/contact Spacing control connections C1-C2 or A1-A2/contact	6 mm –	3 mm 6 mm	3 mm; A2Z12: 6 mm –	– 6 mm
Test voltage control connections/contact Test voltage C1-C2 or A1-A2/contact	4000V –	2000V 4000V	2000V; A2Z12: 4000V –	2000V 4000V
Rated switching capacity	10 A/250V AC	16 A/250V AC	10 A/250V AC	10 A/250V AC
Incandescent lamp and halogen lamp load ¹⁾ 230 V	2000 W ³⁾	2300 W ³⁾	1000 W ³⁾	2000 W ³⁾
Fluorescent lamp load with KVG* in lead-lag circuit or non compensated	1000 VA ³⁾	1000 VA ³⁾	500 VA ³⁾	1000 VA ³⁾
Fluorescent lamp load with KVG* shunt-compensated or with EVG*	500 VA ³⁾	500 VA ³⁾	250 VA ³⁾	500 VA ³⁾
Compact fluorescent lamps with EVG* and energy saving lamps ESL	15x7 W 10x20W ⁴⁾	15x7 W 10x20W	Ion ≤ 35A/10ms ²⁾	15x7 W 10x20W ⁴⁾
Max. switching current DC1: 12 V/24 V DC	8 A	–	–	–
Life at rated load, cos φ = 1 for incandescent lamps 1000 W at 100/h	> 10 ⁵	> 10 ⁵	> 10 ⁵	> 10 ⁵
Life at rated load, cos φ = 0.6 at 100/h	> 4 x 10 ⁴	> 4 x 10 ⁴	> 4 x 10 ⁴	> 4 x 10 ⁴
Maximum conductor cross-section (3-fold terminal)	6 mm ² (4 mm ²)	6 mm ² (4 mm ²)	6 mm ² (4 mm ²)	4 mm ²
Two conductors of same cross-section (3-fold terminal)	2.5 mm ² (1.5 mm ²)	2.5 mm ² (1.5 mm ²)	2.5 mm ² (1.5 mm ²)	1.5 mm ²
Screw head	slotted / crosshead, pozidriv	slotted / crosshead, pozidriv	slotted / crosshead, pozidriv	slotted / crosshead
Type of enclosure/terminals	IP50 / IP20	IP50 / IP20	IP50 / IP20	IP30 / IP20
Electronics				
Time on	100 %	100 %	100 %	100 %
Max./min. temperature at mounting location	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C
Temperature dependence	< 0.2 % per °C	< 0.2 % per °C	< 0.2 % per °C	< 0.2 % per °C
Repeat accuracy at 25°C	±0.1%	±0.1%	±0.1%	±0.1%
Control voltage dependence from 0.9 to 1.1 x rated voltage	none	none	none	none
Stored energy time in the event of power failure (then total reset)	≥ 0.2 seconds	≥ 0.2 seconds	≥ 0.2 seconds	≥ 0.2 seconds
Standby loss (active power) 230V	MFZ12DDX: 0.5 W; MFZ12DX: 0.4-0.6 W; RVZ/AVZ/TGI/EAW12: 0.4 W	0.5 W	0.4 W	0.4 W
Standby loss (active power) 12V ⁵⁾	0.02 W; MFZ12DDX: 0.05 W	–	–	0.02 W
Control current 230 V-control input local ±20%	–	2 mA	2 mA; A2Z12: –	–
Control current universal control voltage 8/12/24/230V (<10s) ± 20%	0.05/0.1/0.2/1mA	2/4/9/5 (100)mA	A2Z12: 0.05/0.1/0.2/1 mA	0.05/0.1/0.2/1mA
Max. parallel capacitance (approx. length) of the control leads at 230V AC	0.2 μF (600m)	0.01 μF (30m) C1-C2: 0.03 μF (100m)	0.01 μF (30m); A2Z12: 0.2 μF (600m)	0.2 μF (600m)

^{b)} Bistable relay as relay contact. The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated. ¹⁾ For lamps with a load of 150 W max. ²⁾ A 40-fold inrush current must be calculated for electronic ballast devices. For steady loads of 1200 W or 600 W use the current-limiting relay SBR12 or SBR61. Product group G, page G3. ³⁾ The maximum load can be used from a delay time or clock cycle of 5 minutes. The maximum load is reduced for shorter times as follows: up to 2 seconds 500 W, up to 2 minutes 1000 W, up to 5 minutes 2000 W. ⁴⁾ When using DX types close attention must be paid that zero passage switching is activated! ⁵⁾ Standby loss at 24 V approx. two times greater than at 12 V.