

Analogue settable Multifunction Time Relay MFZ12-230V with 10 functions



MFZ12-230V



**1 NO contact potential free 10 A/250 V AC. Incandescent lamps 1000 W*.
Standby loss 0.4 watt only.**

Modular device for DIN-EN 60715 TH35 rail mounting.
1 module = 18 mm wide, 58 mm deep.

Control voltage 230V. Supply voltage same as control voltage.
Time setting between 0.1 second and 40 hours.

Functions F (description page E8)

- RV** = off delay
- AV** = operate delay
- TI** = clock generator starting with impulse
- TP** = clock generator starting with pause
- IA** = impulse controlled operate delay (e.g. automatic door opener)
- EW** = fleeting NO contact
- AW** = fleeting NC contact
- ARV** = operate and release delay
- ON** = permanent ON
- OFF** = permanent OFF


The LED below the big rotary switch indicates the contact position while time-out is in progress. It blinks while the relay contact is open, and is continuously ON as long as the relay contact is closed.

The time base T is selected by means of the middle, latching rotary switch **T**. Time-base figures available are 0.1 seconds, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the timebase by the multiplier.

The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).


* The maximum load can be used starting at a delay time or clock cycle of 5 minutes.
The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%,
up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches

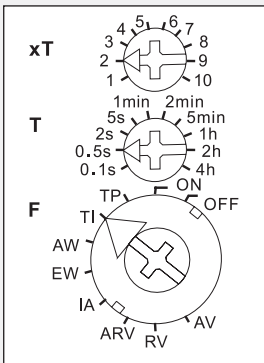

Standard setting ex factory.

Typical connection

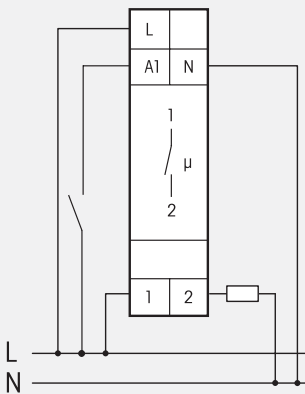

Technical data page E9. Housing for operating instructions GBA12 page Z3.

MFZ12-230V

1 NO 10 A

EAN 4010312603147

39,60 €/pc.

Recommended retail prices excluding VAT.