




30 000 770 -1



**Wireless handheld transmitter
without battery or wire
with double rocker**



FHS4-al/anso

Temperature at mounting location:
-20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.

**Wireless 4-way hand-held transmitter with
double rocker aluminium/anthracite-soft,
49x47 mm, 16 mm high. Weighs only 37
grams. Generates the power for wireless
telegrams itself when the button is
pressed, therefore there is no battery.
Smart Home sensor.**

The batteryless hand-held transmitter FHS4
contains one wireless module with a laser
engraved double rocker.

Therefore it can transmit 4 evaluable
wireless telegrams.

The bottom is painted in aluminum and the
rockers have an anthracite soft paint.

**The wireless module integrated in the
hand-held wireless transmitter can be
taught-in encrypted in all encryptable
actuators of the Series 61, 62 and Series 71
as well as the FAM14. This requires the
FTVW wireless pushbutton encryption
rocker.**

Then lock again the radio module marked 0
at the top.


After that, clip the rockers marked 1 & 3 left
and 2 & 4 right on the radio module.

Encryptable actuators bear the pictogram

Manuals and documents in further
languages:



http://eltako.com/redirect/FHS4-al*anso

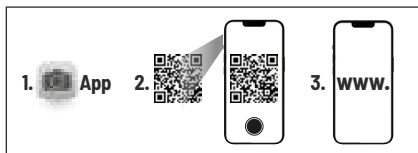

Telegram according to EEP F6-02-01

ORG = 0x05

Data_byte3 = push top right	= 0x70
push bottom right	= 0x50
push top left	= 0x30
push bottom left	= 0x10
release	= 0x00



enocean®

THE UNIQUE WIRELESS **PROFESSIONAL**
SMART HOME STANDARD

Frequency	868.3 MHz
Transmit power	max. 10 mW

**Hereby, Eltako GmbH declares that the radio
equipment type FHS4-al/anso is in com-
pliance with Directive 2014/53/EU.**

**The full text of the EU declaration of con-
formity can be accessed via the QR code or
the internet address under 'Documents'.**

Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

+49 711 943 500 25

technical-support@eltako.de

eltako.com