



30 000 230 - 1



Wireless sensors

Mini hand-held transmitters FMH2, FMH4, FMH2S, FMH4S and FMH8



Temperature at mounting location:
-20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.

Mini hand-held transmitters 43x43 mm, 16 mm high.

Weigh only 30 grams.
FMH2S-wr only 48 grams.

The batteryless mini hand-held transmitter FMH2 contains the same wireless module as the wireless pushbuttons and has 1 rocker. It can transmit 2 evaluable wireless telegrams. The rocker is laser engraved with 0 and 1.

The battery-free mini hand-held transmitter FMH2S-wr for call systems has a pure white rocker laser engraved in red and a gray strap. When triggering (by pressing the red area) he sends the same wireless telegram like a wireless pushbutton and can therefore be taught-in in actuators and the GFVS software. If it will be taught-in in an actuator as 'central on' as an emergency call switch the emergency can only be received with another taught-in switch with 'central off'.

The batteryless mini hand-held transmitter FMH4 contains the same wireless module as the wireless pushbuttons and has 1 double rocker. It can transmit 4 evaluable wireless telegrams. The double rocker is laser engraved with 1, 2, 3 and 4.

The mini hand-held transmitters FMH2S and FMH4S are also prepared to attach a key ring.

Mini hand-held transmitters 45x85 mm, 18 mm high.

Weigh only 60 grams.

The batteryless mini hand-held transmitter FMH8 contains the same wireless module as the wireless pushbuttons and has 8 push-buttons. It can transmit 8 evaluable wireless telegrams.

The housing is laser-engraved with the numerals 1 to 8.

It is possible to activate or deactivate the encryption of the wireless module through an uncontrolled joint operation - eg in your pocket or back pocket - of several keys.

These wireless mini hand-held transmitters can be stuck on the wall, glass or furniture with an adhesive foil like the wireless pushbuttons.

The wireless module integrated in the mini hand-held wireless transmitters can be taught-in encrypted in all encryptable actuators of the Series 61, 62 and Series 71 as well as the FAM14. This requires the FTWV wireless push-button encryption rocker.

Encryptable actuators bear the pictogram 

Teaching-in wireless sensors in wireless actuators


All sensors must be taught-in in the actuators so that they can detect and execute commands.

The teach-in process is described in the operating instructions of actuators.

Manuals and documents in further languages



<http://eltako.com/redirect/FMH>

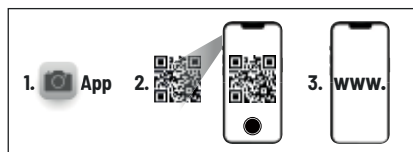

enocean®

THE UNIQUE WIRELESS PROFESSIONAL
SMART HOME STANDARD

Frequency	868.3 MHz
Transmit power	max. 10 mW

Hereby, Eltako GmbH declares that the radio equipment type FMH2/FMH4/FMH2S/FMH4S/FMH8 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: eltako.com

The crossed-out waste container indicates that batteries may not be disposed with other household or commercial waste.

WEEE registration number DE 30298319


Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

 +49 711 94350025

 technical-support@eltako.de

eltako.com

42/2022 Subject to change without notice.