



30 014 063 - 2

Wireless output module FTS14FA

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:
-20°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.


Wireless output module for FTS14 systems with FTS14EM and/or FTS14TG. Only 0.5 watt standby loss.

Modular device for DIN-EN 60715 TH35 rail
mounting. 1 module = 18 mm wide, 58 mm
deep.

Connection to the Eltako-RS485 bus. Bus cross wiring and power supply with jumper. Operation in conjunction with FTS14KS with or without FAM14.

A rotary switch defines the FTS14EM or
FTS14TG group to which an FTS14FA belongs.
Therefore a maximum of 8 FTS14FAs can be
connected to a bus. Every telegram from an
FTS14EM or FTS14TG is sent with its own ID to
the Eltako building wireless system.

Mode switch



**Rotary switch on the FTS14FA set to
position 1:** Sends telegrams of all FTS14EMs
set to 1.

**Rotary switch on the FTS14FA set to
position 101:** Sends telegrams of all FTS14EMs
set to 101.

**Rotary switch on the FTS14FA set to
position 201:** Sends telegrams of all FTS14EMs
set to 201.

**Rotary switch on the FTS14FA set to
position 301:** Sends telegrams of all FTS14EMs
set to 301.

**Rotary switch on the FTS14FA set to
position 401:** Sends telegrams of all FTS14EMs
set to 401.

**Rotary switch on the FTS14FA set to
position TG2/5:** Sends telegrams of all
FTS14TG set to 2 or 5.

**Rotary switch on the FTS14FA set to
position TG3/6:** Sends telegrams of all
FTS14TG set to 3 or 6.


**Rotary switch on the FTS14FA set to
position TG4/7:** Sends telegrams of all
FTS14TG set to 4 or 7.

**Rotary switch on the FTS14FA set to position
OFF:** The FTS14FA is switched off.

The green LED under the rotary switch will
flash shortly when a wireless telegram is
sent.

Telegrams from an FAM14 are not sent
additionally by the FTS14FA.

Typical connection

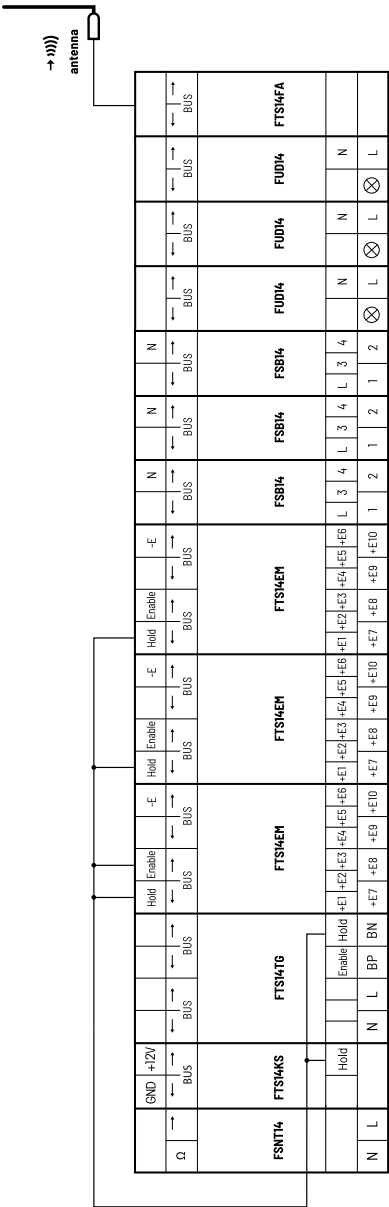

The second terminator which is included in
the FTS14KS has to be plugged to the last
bus participant.

Manuals and documents in further languages



<http://eltako.com/redirect/FTS14FA>



THE UNIQUE WIRELESS **PROFESSIONAL**
SMART HOME STANDARD

Frequency 868.3 MHz

Transmit power max. 10 mW

Hereby, Eltako GmbH declares that the radio
equipment type FTS14FA is in compliance
with Directive 2014/53/EU.

The full text of the EU declaration of con-
formity can be accessed via the QR code or
the internet address under 'Documents'.

Must be kept for later use!

We recommend the housing for
operating instructions GBA14.

Eltako GmbH

D-70736 Fellbach

Technical Support English:

+49 711 943 500 25

technical-support@eltako.de

eltako.com

04/2023 Subject to change without notice.