



Wireless transmitter module
 FSM60B, with batteries for water
 probe and pushbuttons

**Only skilled electricians may install
 this electrical equipment otherwise
 there is the risk of fire or electric
 shock!**

Temperature at mounting location:
 -20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:
 annual average value <75%.

Wireless transmitter module with batteries
 and antenna rod. LxWxH: 60x46x30mm
 (excluding antenna and fixing screws).

This wireless transmitter module can be
 operated by an FWS60 water probe or a
 pushbutton and transmits a variety of
 adjustable wireless telegrams to the
 Eltako building wireless system.

An internal jumper permits selection be-
 tween 4 operating modes.

In mode 1 (jumper plugged at Position
 JP1) wireless telegrams are sent from a
 wireless pushbutton, such as 'Press
 double rocker at bottom left'.

In mode 2 (jumper plugged at Position 2)
 wireless telegrams are sent from a wire-
 less pushbutton, such as 'Press double
 rocker at top right and bottom right'.

In mode 3 (jumper plugged at Position 3;
 factory setting) wireless telegrams are
 sent to EnOcean Standard EEP A5-30-03.

In mode 4 (jumper plugged at Position 4)
 wireless telegrams are sent to EnOcean
 Standard EEP A5-30-01.

In modes 3 and 4 a status telegram is
 also sent every 33 minutes.

The power supply that lasts several years
 is provided by an internal 3V button cell
 CR2032. The charge status of the battery
 is transmitted in every data and status
 telegram in mode 4.


**The foil which is behind the battery has
 to be pulled out for initial operation.**

Press the internal LRN button **to teach in**
 the actuator which is ready for teach-in.

Release two screws on the front to
 remove the cover. When closing, make
 sure the seal is in the correct position.

An M12 screw is located on the under-
 side to connect the cable.

It is not permitted to activate several wire-
 less transmitter modules at the same time.

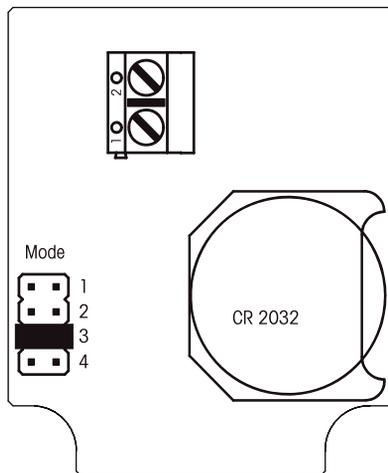

The crossed-out waste container indi-
 cates that batteries may not be disposed
 with other household or commercial
 waste.

**Batteries can be returned free of charge
 to the retail outlet after use.**



**Attention: Danger of explosion
 if battery is replaced improperly.
 Only replace it by an equivalent
 type!**

EnOcean wireless

Frequency	868.3 MHz
Transmit power	max. 10 mW

**Hereby, Eltako GmbH declares that the
 radio equipment type FSM60B is in
 compliance with Directive 2014/53/EU.
 The full text of the EU declaration of
 conformity is available at the following
 internet address: eltako.com**

Must be kept for later use!

Eltako GmbH

D-70736 Fellbach

Technical Support English:

Michael Thünte +49 176 13582514

thunte@eltako.de

Marc Peter +49 173 3180368

marc.peter@eltako.de

eltako.com