

Switching relay



ER12DX-UC

ER12-200-8..230V UC

ER12-110-8..230V UC

Incandescent lamp load up to 2000W.

No standby loss.

Modular devices for DIN-EN 60715 TH35 rail mounting.

1 module = 18mm wide, 58mm deep.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

Universal control voltage 8 to 230V UC.

Very low switching noise.

Contact position indicator with LED.

By using a bistable relay coil power loss and heating is avoided even in the on mode.

The relay contact can be open or closed when putting into operation. It will be synchronised at first operation.

ER12DX-:

1 NO contact potential free 16A/250V AC.

With the Eltako-Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230V AC 50Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 1(L) for this. This gives an standby consumption of only 0.1 Watt.

If the contact is used for controlling switching devices which do not perform zero passage switching themselves, (N) should not be connected because the additional closing delay otherwise causes the opposite effect.

Same terminal connection as electromechanical switching relay R12-100-.

ER12-200-:

2 NO contacts potential free 16A/250V AC.

Maximum current across both contacts 20A for 230V.

Same terminal connection as electromechanical switching relay R12-200-.


ER12-110-:

1 NO + 1 NC contact potential free 16A/250V AC.


Same terminal connection as electromechanical switching relay R12-110-.

Typical connections

ER12DX

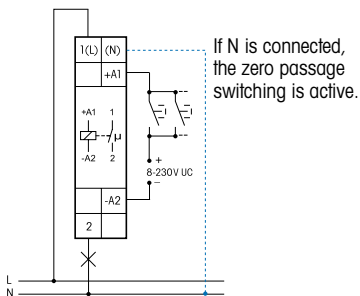

ER12-200/110

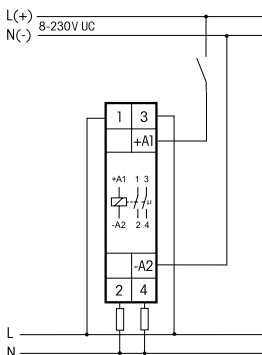

Technical Data

Control voltage	8 to 230V UC
Rated switching capacity	16A/250V AC
Incandescent lamp load and halogen lamp load ¹⁾	2000W 230V
Fluorescent lamp load with KVG*	1000VA in lead-lag circuit or non compensated
Fluorescent lamps with KVG* shunt-compensated or with EVG*	500VA
Compact fluorescent lamp with EVG* and energy saving lamps	
ER12DX	15 x 7 W, 10 x 20 W ²⁾
ER12-200/110	I on ≤ 70A/10ms ³⁾
Standby loss	none

¹⁾ For lamps with 150W max.²⁾ If zero passage switching is activated, otherwise same as for ER12-200/110.³⁾ For electronic ballast gears a 40fold inrush current has to be calculated. For steady loads of 1200W use the current-limiting relay SBR12.

* EVG = electronic ballast units;

KVG = conventional ballast units



The strain relief clamps of the terminals must be closed, that means the screws must be tightened for testing the function of the device. The terminals are open ex works.

Warning!

Only a trained electrician may install this equipment, otherwise there is a risk of fire or electric shock.