

ER12SSR-UC



Noiseless solid state relay potential free, 400 Watt. No standby loss.

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

Universal control voltage: 8 to 230 V UC.

Contact position indication with LED.


Switching voltage 230 V AC.

Zero passage switching.

With automatic overtemperature shutdown.

With a load < 1W a GLE must be switched parallel to the load.

Typical connection

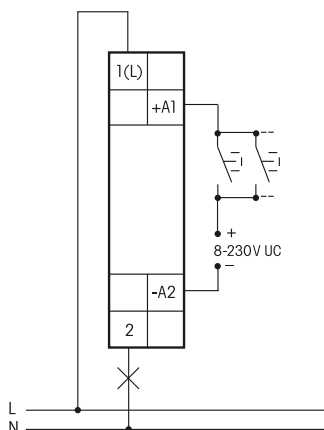

Technical data page 12-16.
Housing for operating instructions GBA14,
see accessoires, chapter Z.

ER12SSR-UC	Noiseless solid state relay potential free	EAN 4010312206720	44,70 €/pc.
-------------------	--	-------------------	--------------------