

NLZ12NP-230V+UC



1 NO contact not potential free 16 A/250 V AC. Standby loss 0.5 watt only.

Modular device for DIN EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

Zero passage switching to protect contacts and consumers.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

Control, supply and switching voltage 230 V. Additionally 8 to 230 V UC electrically isolated universal control voltage.

Very low switching noise.


Off-delay time settable from 1 to 12 min with the top rotary switch. Operating delay settable from 0 to 12 minutes with the middle rotary switch. Permanent ON and permanent OFF with the bottom rotary switch.

Function: When the control contact (light switch) is closed the operate delay AV starts (if not set '0 minutes'), on time-out the fan is switched on. The set release delay RV (delay time) starts when the control contact opens and if a set operating delay has elapsed.

The fan switches off on time-out.

This off-delay timer can be controlled by all dimmer switches EUD12 and EUD61 even in the minimum dimming position.

Function rotary switches

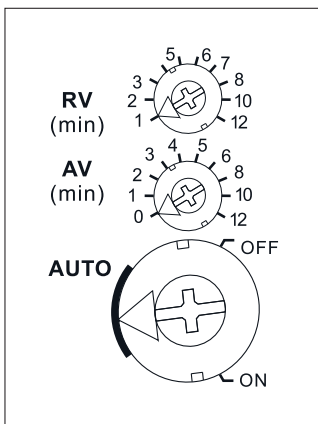

Standard setting ex works.

RV = release delay (delay time)


AV = operating delay




Manuals and documents in further languages:
https://eltako.com/redirect/NLZ12NP-230V*UC

Technical data page 15-13.
 Housing for operating instructions
 GBA14 page 1-50 chapter 1.


Typical connections

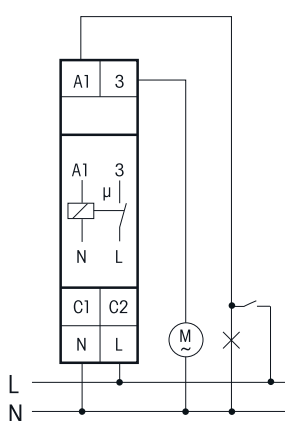

Fan control through light switch

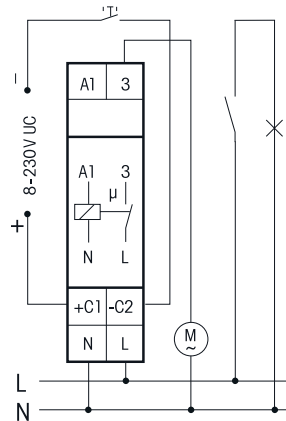

Fan control through ultra low voltage door contact, light is controlled separately

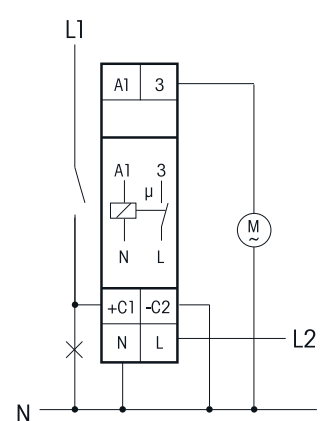

Fan control through light switch in case of different potentials on switch and fan

| | | | |
|------------------------|------------------------------------|--------------------------|--------------------|
| NLZ12NP-230V+UC | Off-delay timer, 1 NO contact 16 A | Art. No. 23100704 | 59,60 €/pc. |
|------------------------|------------------------------------|--------------------------|--------------------|