


# NR12-002-3X230V

**2 CO contacts potential free 10 A/250 V AC. Standby loss 0.8 watt only.**

Modular device for DIN 60715 TH35 rail mounting.  
 2 modules = 36 mm wide, 58 mm deep.  
 All functions same as NR12-001-3x230V but with a second CO contact.  
**Maximum fusing 16 A.**




### Typical connections: 1 phase monitoring

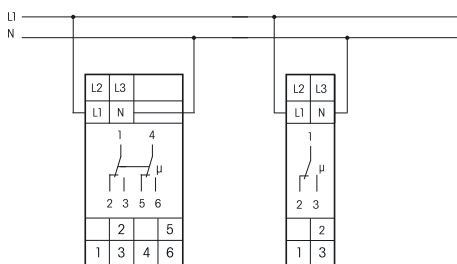

NR12-002-3x230V      NR12-001-3x230V

### Typical connections: 3 phase monitoring

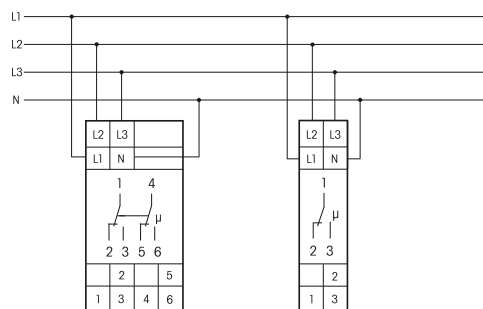

NR12-002-3x230V      NR12-001-3x230V

Technical data page 14-9.  
 Housing for operating instructions GBA14,  
 see accessoires, chapter Z.

<b>NR12-002-3x230V</b>	2 CO contact 10 A	EAN 4010312202548	<b>65,70 €/pc.</b>
------------------------	-------------------	-------------------	--------------------