

Rotary dimmer

DTD65-230V and DTD65L-230V



NEW


Rotary dimmer without N connection for single mounting
84x84x25 mm or mounting into the E-design switching system.
Installation depth 33 mm.

Universal dimmer switch with rotary knob

For dimmable 230V LED lamps, dimmable energy saving lamps
ESL, incandescent and halogen lamps 230V.

Automatic lamp detection

With adjustable minimum and maximum brightness

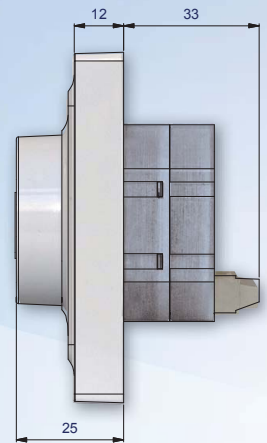

DTD65-230V

- Power MOSFET up to 300W
- No minimum load required
- For R, L and C loads
- Standby loss 0.14 watt only

DTD65L-230V without N connection

- Power MOSFET up to 200W
- Minimum load 4 W
- For R and C loads
- Standby loss 0.5 watt only

DTD65-230V-wg	Rotary dimmer, pure white glossy	EAN 4010312317426	54,80 €/pc.
DTD65L-230V-wg	Rotary dimmer without N connection, pure white glossy	EAN 4010312317716	54,80 €/pc.

Recommended retail prices excluding VAT.