
iTop OnWall



Ready for the Future

Peace of Mind with all Current and Future iPads – iRoom's iTop OnWall accommodates all iPad sizes through its adjustable, sliding charging connector. Available for iPads with a lightning or USB-C charging port, iTop is comes in 14 different color combinations to match any iPad and any interior design.

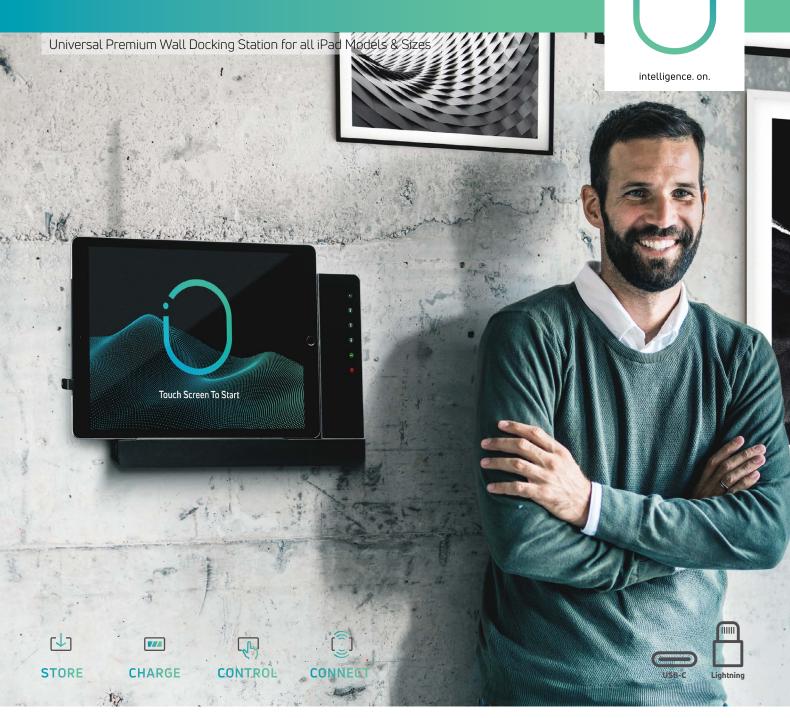

FEATURES:

Adjustable, Sliding Charging Connector O

Lightning or USB-C for all iPad sizes from iPad mini up to the iPad Pro 12.9"

High-Quality Materials @

Aluminum and glass match the Apple Design

7 Individual Colors, Matching your iPad Model

Available for the aluminum base, combined with black or white glass

Hands-Free Unlocking

Of the iPad Screen via Proximity Sensor

Certified Quality

Apple-certified Charging Electronics and Connector

Smart Battery Management @

Extends iPad Battery Life

Antitheft Protection @

Of the iPad with code-protected iPad Removal

Room Environmental Monitoring 🥑

Sensors for Room Temperature, Humidity, Light, and Air Quality

Smart Home / Smart Business Integration

Through built-In Control Processor and Touch Keypad

Use Professional Control Systems

Crestron, Control4, Eltako EnOcean, Gira HomeServer and many more

Powered by PoE+ and 100-240 V

Only one Cat Cable for Power and Control Communication



iTop OnWall



Specifications

Туре	iTop OnWall
Outside Dimensions	307mm x 218mm x 35mm / 12.1" x 8.6" x 1.4"
Cut-Out Dimensions	295mm x 205mm x 65mm / 11.98" x 8.43" x 2.56"
Power Options	PoE+ (IEEE 802.3at) 30 Watts Power Output or 100 - 240 V AC
iPad Charging Connector	Lightning or USB-C (depending on model)
LAN	10 Mbps
Communication	TCP/IP, status & control
Function Description	Store and Charge the iPad; AV & HVAC Control, Environment Monitoring via Sensors for Room Temperature, Humidity, Light Level and Air Quality*
Intelligent Glass Bezel	6 touch buttons (with customizable icons) / 1 motion sensor
Audio output	3,5 mm audio jack analog stereo / adjustable Line-Out
USB port	USB-A 5V/1A max. for USB accessories
Installation Box / Back Box	Included
Operating Temperature	0 - 35°C or 32 - 95°F
Operating Humidity	20% - 90% RH non-condensing
Weight	3,8 kg / 8.4 lb
* available in Q1/2023	

Colors Aluminum Base Image: Imag

